


室内灯具光度数据

实测参数: U:230.3V I:0.0614A P:5.980W PF:0.4233 实检光通:149.087x1 lm		
灯具名称: Linear 桌灯	灯具类型:	灯具重量:
外型尺寸:	灯具规格:	测试编号:202000605A0001
制造厂商: TARGET	发光口面:0.22*0.1	保护角:

光源数据		光度数据				光效: 24.93 lm/W
型号Linear Mounted Lamp 232		峰值光强(cd)	49.96	S/MH(C0/180)	1.67	
标称功率(W)	6	灯具效率(%)	100.0	S/MH(C90/270)	1.70	
额定电源电压(V)	230	总光通量(lm)	149.09	η UP,DN(C0-180)	1.3,48.8	
额定光通量(lm)	149.087	CIE分类	直接	η UP,DN(C180-360)	1.2,48.7	
灯具内光源数(只)	1	上射光通比(%)	2.5	CIBSE SHR NOM	1.50	
实测电源电压(V)	230.3	下射光通比(%)	97.5	CIBSE SHR MAX	1.55	

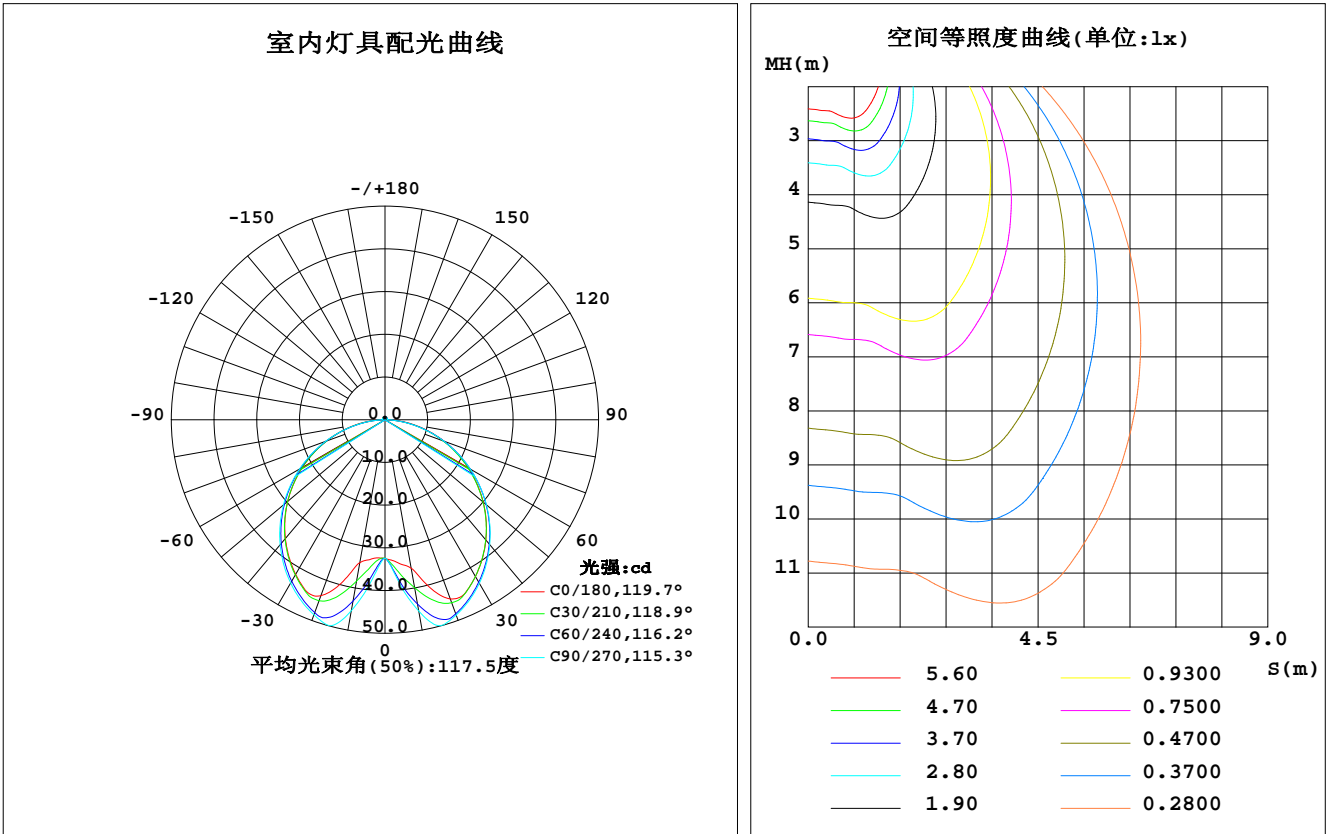


C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度:25℃
测试人员:yechihong
测试日期:2020-06-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.272
环境湿度:70%
测试距离:8.425米 [K=1.0000]
备注:

灯具环带光通量和亮度限制曲线

环带光通量：

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ(°)	Φ环	Φ总	%lum,lamp
5	33.54	36.63	38.27	35.46	32.62	35.70	38.08	36.60	0- 5	0.8213	0.8213	0.55,0.55
10	35.27	41.80	45.45	40.63	33.96	40.91	45.34	41.69	5- 10	2.765	3.586	2.41,2.41
15	40.66	45.75	49.91	44.88	39.59	45.28	49.93	45.63	10- 15	5.145	8.731	5.86,5.86
20	44.61	47.39	48.67	46.74	43.81	46.96	48.61	47.18	15- 20	7.626	16.36	11,11
25	44.65	45.76	46.66	45.22	44.06	45.30	46.61	45.55	20- 25	9.674	26.03	17.5,17.5
30	42.37	43.38	44.19	42.87	41.80	42.93	44.15	43.17	25- 30	11.18	37.21	25,25
35	39.70	40.66	41.33	40.18	39.19	40.19	41.35	40.43	30- 35	12.26	49.47	33.2,33.2
40	36.73	37.60	38.16	37.13	36.29	37.13	38.17	37.38	35- 40	12.93	62.39	41.8,41.8
45	33.52	34.26	34.70	33.83	33.11	33.82	34.72	34.07	40- 45	13.17	75.56	50.7,50.7
50	30.02	30.68	30.99	30.26	29.70	30.25	31.04	30.47	45- 50	12.98	88.54	59.4,59.4
55	26.36	26.90	27.08	26.53	26.09	26.48	27.15	26.70	50- 55	12.38	100.9	67.7,67.7
60	22.55	22.95	23.03	22.62	22.34	22.55	23.11	22.76	55- 60	11.39	112.3	75.3,75.3
65	18.66	18.89	18.84	18.61	18.51	18.52	18.96	18.75	60- 65	10.05	122.4	82.1,82.1
70	14.70	14.80	14.64	14.55	14.60	14.46	14.76	14.66	65- 70	8.421	130.8	87.7,87.7
75	10.76	10.70	10.45	10.49	10.72	10.40	10.59	10.57	70- 75	6.571	137.3	92.1,92.1
80	6.912	6.691	6.380	6.521	6.929	6.438	6.521	6.595	75- 80	4.585	141.9	95.2,95.2
85	3.255	2.929	2.629	2.797	3.304	2.726	2.738	2.868	80- 85	2.565	144.5	96.9,96.9
90	0.7610	0.6699	0.6843	0.6561	0.6473	0.6480	0.5704	0.6801	85- 90	0.8038	145.3	97.5,97.5
95	0.6655	0.6021	0.6292	0.5976	0.5703	0.5930	0.5613	0.6202	90- 95	0.3448	145.6	97.7,97.7
100	0.6066	0.5975	0.5977	0.5885	0.5432	0.5659	0.5613	0.5930	95-100	0.3192	146.0	97.9,97.9
105	0.5794	0.5975	0.5930	0.5885	0.5387	0.5614	0.5613	0.5749	100-105	0.3063	146.3	98.1,98.1
110	0.5704	0.5975	0.5885	0.5886	0.5387	0.5568	0.5659	0.5749	105-110	0.2970	146.6	98.3,98.3
115	0.5659	0.6021	0.5885	0.6021	0.5432	0.5568	0.5794	0.5749	110-115	0.2883	146.9	98.5,98.5
120	0.5659	0.6112	0.5885	0.6111	0.5568	0.5568	0.5885	0.5749	115-120	0.2792	147.1	98.7,98.7
125	0.5659	0.6292	0.6066	0.6247	0.5750	0.5568	0.6021	0.5749	120-125	0.2688	147.4	98.9,98.9
130	0.5749	0.6429	0.6066	0.6428	0.5931	0.5613	0.6202	0.5749	125-130	0.2580	147.7	99,99
135	0.6110	0.6610	0.6247	0.6609	0.6203	0.6066	0.6428	0.5975	130-135	0.2471	147.9	99.2,99.2
140	0.6202	0.6836	0.6384	0.6837	0.6472	0.6157	0.6609	0.6065	135-140	0.2342	148.1	99.4,99.4
145	0.6518	0.6971	0.6700	0.7017	0.6657	0.6247	0.6836	0.6292	140-145	0.2178	148.4	99.5,99.5
150	0.6745	0.6971	0.6834	0.7017	0.6745	0.6562	0.6881	0.6473	145-150	0.1974	148.6	99.6,99.6
155	0.6836	0.6971	0.6971	0.7017	0.6561	0.6746	0.6881	0.6789	150-155	0.1725	148.7	99.8,99.8
160	0.6384	0.6880	0.7062	0.6745	0.5658	0.6790	0.6881	0.6790	155-160	0.1423	148.9	99.9,99.9
165	0.4800	0.5749	0.6972	0.5881	0.4210	0.6159	0.6246	0.6159	160-165	0.1040	149.0	99.9,99.9
170	0.4436	0.4662	0.5797	0.4707	0.4165	0.5071	0.5201	0.4980	165-170	0.0637	149.0	100,100
175	0.4436	0.4346	0.4527	0.4391	0.4165	0.4346	0.4301	0.4346	170-175	0.0328	149.1	100,100
180	0.4436	0.4346	0.4301	0.4391	0.4165	0.4346	0.4301	0.4346	175-180	0.0104	149.1	100,100
单位:° 光强:cd MAX (Ii - Iavg)/Iavg (0-135) = 158.0 %										单位:lm		

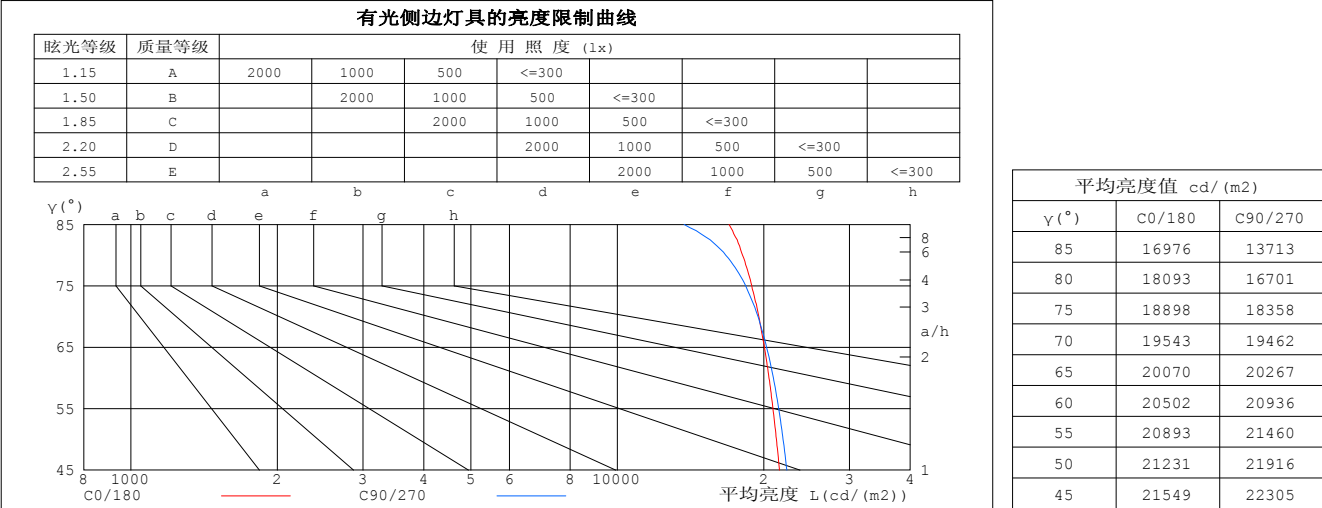


C角度范围： 0度 - 360度
C角度间隔： 5.0度
测试速度：快速
环境温度:25℃
测试人员:yechihong
测试日期:2020-06-05

γ角度范围： 0度 - 180度
γ角度间隔： 0.5度
测试系统：远方(EVERFINE)GO-2000A_v1系统 V2.0.272
环境湿度:70%
测试距离:8.425米 [K=1.0000]
备注：

工作面利用系数和灯具概算曲线

实测参数: U:230.3V I:0.0614A P:5.980W PF:0.4233 实检光通:149.087x1 lm		
灯具名称: Linear 桌灯	灯具类型:	灯具重量:
外型尺寸:	灯具规格:	测试编号:202000605A0001
制造厂商: TARGET	发光口面:0.22*0.1	保护角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	工 作 面 利 用 系 数															
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.10	1.10	1.10	1.04	1.04	1.04	.00	.00	.00	.97
1.0	1.03	.98	.94	1.00	.96	.93	.96	.92	.89	.91	.88	.86	.87	.85	.83	.81
2.0	.89	.82	.76	.87	.81	.75	.83	.78	.73	.79	.75	.71	.76	.72	.69	.67
3.0	.78	.70	.63	.76	.68	.62	.73	.66	.61	.70	.64	.59	.67	.62	.58	.56
4.0	.69	.60	.53	.67	.59	.52	.64	.57	.51	.62	.56	.50	.59	.54	.50	.47
5.0	.61	.52	.45	.60	.51	.45	.58	.50	.44	.55	.49	.44	.53	.47	.43	.41
6.0	.55	.46	.39	.54	.45	.39	.52	.44	.39	.50	.43	.38	.48	.42	.37	.35
7.0	.50	.41	.35	.49	.40	.34	.47	.39	.34	.45	.39	.33	.44	.38	.33	.31
8.0	.45	.37	.31	.44	.36	.30	.43	.35	.30	.41	.35	.30	.40	.34	.29	.27
9.0	.41	.33	.27	.41	.33	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.25
10.0	.38	.30	.25	.37	.30	.25	.36	.29	.24	.35	.29	.24	.34	.28	.24	.22

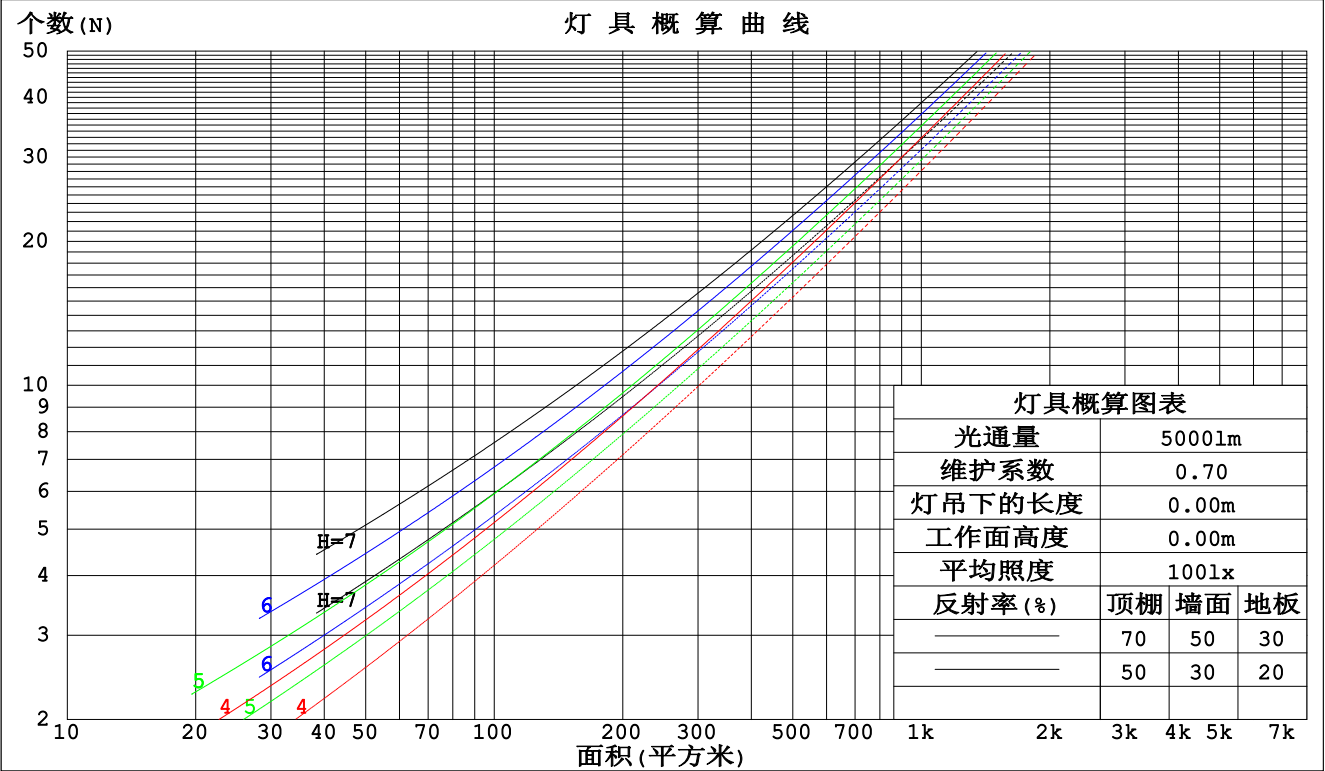

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度:25℃
测试人员:yechihong
测试日期:2020-06-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.272
环境湿度:70%
测试距离:8.425米 [K=1.0000]
备注:

墙面和天花板利用系数

实测参数: U:230.3V I:0.0614A P:5.980W PF:0.4233 实检光通:149.087x1 lm					
灯具名称: Linear 桌灯			灯具类型:		灯具重量:
外型尺寸:			灯具规格:		测试编号:202000605A0001
制造厂商: TARGET			发光口面:0.22*0.1		保护角:

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	墙 壁 面 利 用 系 数															
0.0																
1.0	.319	.181	.057	.311	.177	.056	.296	.170	.054	.283	.163	.052	.270	.157	.050	
2.0	.298	.163	.050	.291	.160	.049	.278	.155	.048	.266	.149	.047	.255	.144	.045	
3.0	.275	.146	.044	.269	.144	.043	.257	.139	.042	.246	.135	.041	.236	.131	.040	
4.0	.253	.131	.039	.248	.130	.038	.237	.126	.038	.227	.122	.037	.219	.119	.036	
5.0	.234	.119	.034	.229	.117	.034	.219	.114	.034	.211	.111	.033	.203	.108	.033	
6.0	.216	.108	.031	.212	.107	.031	.204	.104	.030	.196	.102	.030	.189	.099	.029	
7.0	.201	.099	.028	.197	.098	.028	.190	.096	.028	.183	.094	.027	.176	.091	.027	
8.0	.188	.092	.026	.184	.091	.026	.177	.089	.025	.171	.087	.025	.165	.085	.025	
9.0	.176	.085	.024	.173	.084	.024	.166	.082	.023	.161	.081	.023	.155	.079	.023	
10.0	.165	.079	.022	.162	.078	.022	.157	.077	.022	.152	.075	.021	.147	.074	.021	

顶棚	80%			70%			50%			30%			10%			0
墙面	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
地板	20%			20%			20%			20%			20%			0
室空间比	天 花 板 利 用 系 数															
0.0	.210	.210	.210	.179	.179	.179	.122	.122	.122	.070	.070	.070	.022	.022	.022	
1.0	.200	.176	.153	.171	.151	.132	.117	.104	.091	.068	.060	.053	.022	.019	.017	
2.0	.193	.152	.117	.165	.130	.101	.113	.090	.070	.065	.052	.041	.021	.017	.013	
3.0	.185	.134	.093	.159	.116	.081	.109	.080	.057	.063	.047	.033	.020	.015	.011	
4.0	.178	.121	.078	.152	.104	.067	.105	.073	.047	.061	.043	.028	.020	.014	.009	
5.0	.170	.111	.067	.146	.096	.058	.101	.067	.041	.058	.039	.024	.019	.013	.008	
6.0	.163	.102	.059	.140	.089	.051	.097	.062	.036	.056	.036	.021	.018	.012	.007	
7.0	.156	.095	.053	.134	.083	.046	.093	.058	.033	.054	.034	.019	.017	.011	.006	
8.0	.150	.090	.048	.129	.078	.042	.089	.055	.030	.052	.032	.018	.017	.011	.006	
9.0	.144	.085	.045	.124	.074	.039	.086	.052	.028	.050	.031	.017	.016	.010	.006	
10.0	.138	.081	.042	.119	.070	.037	.083	.049	.026	.048	.029	.016	.016	.010	.005	

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度:25℃
测试人员:yechihong
测试日期:2020-06-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.272
环境湿度:70%
测试距离:8.425米 [K=1.0000]
备注:

UGR(Unified Glare Rating)数据表

实测参数: U:230.3V I:0.0614A P:5.980W PF:0.4233 实检光通:149.087x1 lm										
灯具名称: Linear 桌灯					灯具类型:			灯具重量:		
外型尺寸:					灯具规格:			测试编号:202000605A0001		
制造厂商: TARGET					发光口面:0.22*0.1			保护角:		
反射比: 天花板	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
墙面	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
房间尺寸	交叉(Viewed crosswise)					向前(Viewed endwise)				
x = 2H y = 2H	23.3	24.8	23.6	25.1	25.3	23.5	25.0	23.8	25.3	25.5
3H	24.9	26.3	25.3	26.6	26.9	25.1	26.5	25.4	26.8	27.0
4H	25.6	26.9	26.0	27.2	27.5	25.7	27.0	26.1	27.3	27.7
6H	26.2	27.4	26.5	27.7	28.1	26.2	27.4	26.6	27.8	28.1
8H	26.4	27.6	26.7	27.9	28.2	26.3	27.5	26.7	27.9	28.2
12H	26.5	27.6	26.9	28.0	28.4	26.4	27.6	26.8	27.9	28.3
4H 2H	24.0	25.3	24.3	25.6	25.9	24.1	25.4	24.5	25.7	26.0
3H	25.7	26.9	26.1	27.2	27.6	25.9	27.0	26.3	27.4	27.7
4H	26.6	27.6	27.0	28.0	28.4	26.6	27.7	27.1	28.1	28.5
6H	27.2	28.2	27.7	28.6	29.0	27.2	28.2	27.7	28.6	29.0
8H	27.5	28.4	27.9	28.8	29.2	27.5	28.3	27.9	28.7	29.2
12H	27.7	28.5	28.1	28.9	29.4	27.6	28.4	28.0	28.8	29.3
8H 4H	26.9	27.7	27.3	28.1	28.6	26.9	27.8	27.4	28.2	28.7
6H	27.7	28.4	28.2	28.9	29.3	27.7	28.4	28.2	28.9	29.4
8H	28.0	28.7	28.5	29.2	29.7	28.0	28.6	28.5	29.1	29.6
12H	28.3	28.9	28.8	29.4	29.9	28.2	28.8	28.7	29.2	29.8
12H 4H	26.9	27.7	27.3	28.1	28.6	26.9	27.8	27.4	28.2	28.6
6H	27.8	28.4	28.3	28.9	29.4	27.8	28.4	28.3	28.9	29.4
8H	28.1	28.7	28.7	29.2	29.7	28.1	28.7	28.6	29.1	29.7
不同间隔布灯时,观察者位置引起的UGR变化:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.1 / - 0.3					+ 0.2 / - 0.3				

依据CIE Pub.117计算,表格已按149.11lm光源光通进行修正($81\log(F/F_0) = -6.6$)。

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度:25℃
测试人员:yechihong
测试日期:2020-06-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.272
环境湿度:70%
测试距离:8.425米 [K=1.0000]
备注:

UF利用系数表

实测参数: U:230.3V I:0.0614A P:5.980W PF:0.4233 实检光通:149.087x1 lm		
灯具名称: Linear 桌灯	灯具类型:	灯具重量:
外型尺寸:	灯具规格:	测试编号:202000605A0001
制造厂商: TARGET	发光口面:0.22*0.1	保护角:


反 射 比 / REFLECTANCE										
天花板	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
墙壁	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
工作面	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
室形指数	利用系数 UTILIZATION FACTORS(%) $k(RI) \times RCR = 5$									
$k = 0.60$	56	44	37	55	44	37	54	43	37	30
0.80	66	54	46	65	53	46	63	53	46	39
1.00	74	63	55	73	62	55	70	63	54	47
1.25	81	71	63	80	70	63	77	68	62	54
1.50	86	76	69	85	75	68	81	73	67	59
2.00	93	85	78	91	83	77	88	81	75	67
2.50	97	89	83	95	88	82	91	85	80	71
3.00	101	94	88	99	92	87	94	89	84	75
4.00	105	99	94	102	97	93	98	93	90	80
5.00	108	102	98	105	100	96	100	96	93	83
ROOM INDEX	UF(总)									UF(直接)
依据标准文件 DIN EN 13032-2 2004			悬挂灯				安装距高比 SHRNOM = 1.25			

C角度范围: 0度 - 360度
 C角度间隔: 5.0度
 测试速度: 快速
 环境温度: 25℃
 测试人员: yechihong
 测试日期: 2020-06-05

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.272
 环境湿度: 70%
 测试距离: 8.425米 [K=1.0000]
 备注:

灯 具 等 光 强 曲 线

实测参数: U:230.3V I:0.0614A P:5.980W PF:0.4233 实检光通:149.087x1 lm		
灯具名称: Linear 桌灯	灯具类型:	灯具重量:
外型尺寸:	灯具规格:	测试编号:202000605A0001
制造厂商: TARGET	发光口面:0.22*0.1	保护角:

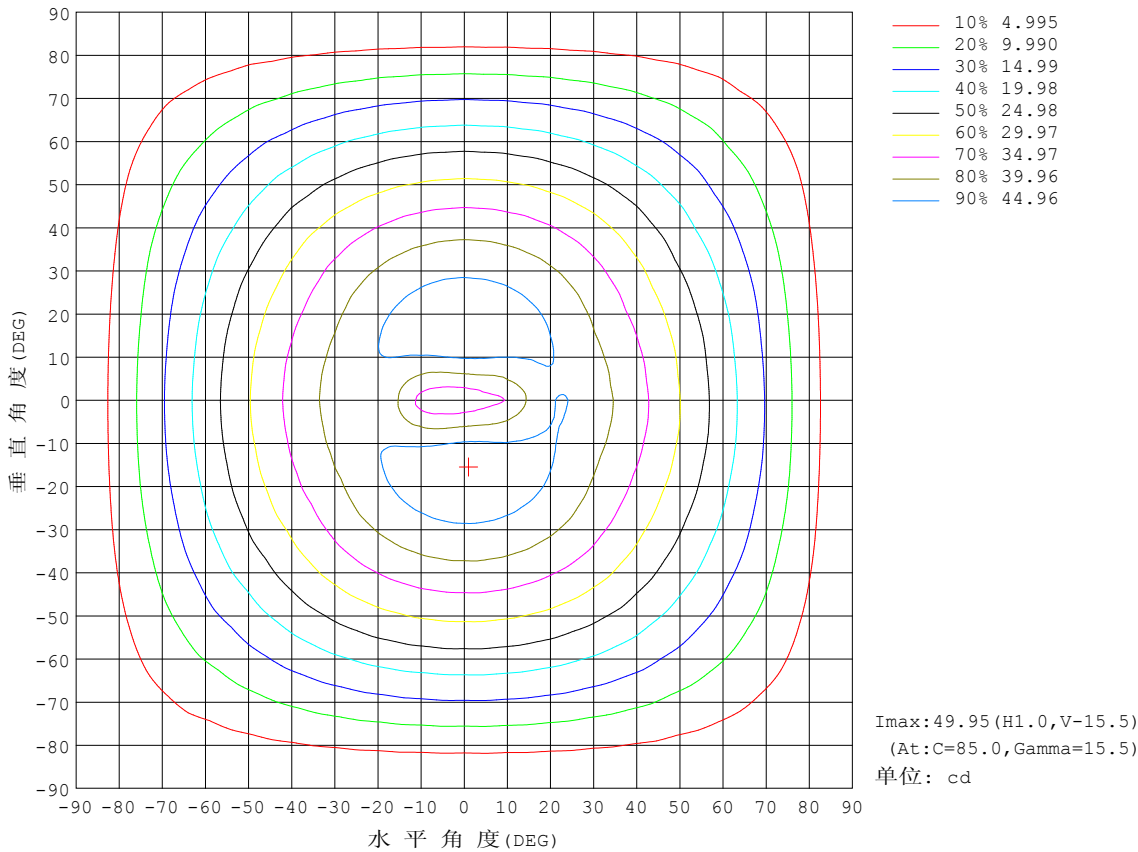


C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度:25℃
测试人员:yechihong
测试日期:2020-06-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.272
环境湿度:70%
测试距离:8.425米 [K=1.0000]
备注:

灯 具 有 效 平 均 照 度 图

实测参数: U:230.3V I:0.0614A P:5.980W PF:0.4233 实检光通:149.087x1 lm		
灯具名称: Linear 桌灯	灯具类型:	灯具重量:
外型尺寸:	灯具规格:	测试编号:202000605A0001
制造厂商: TARGET	发光口面:0.22*0.1	保护角:

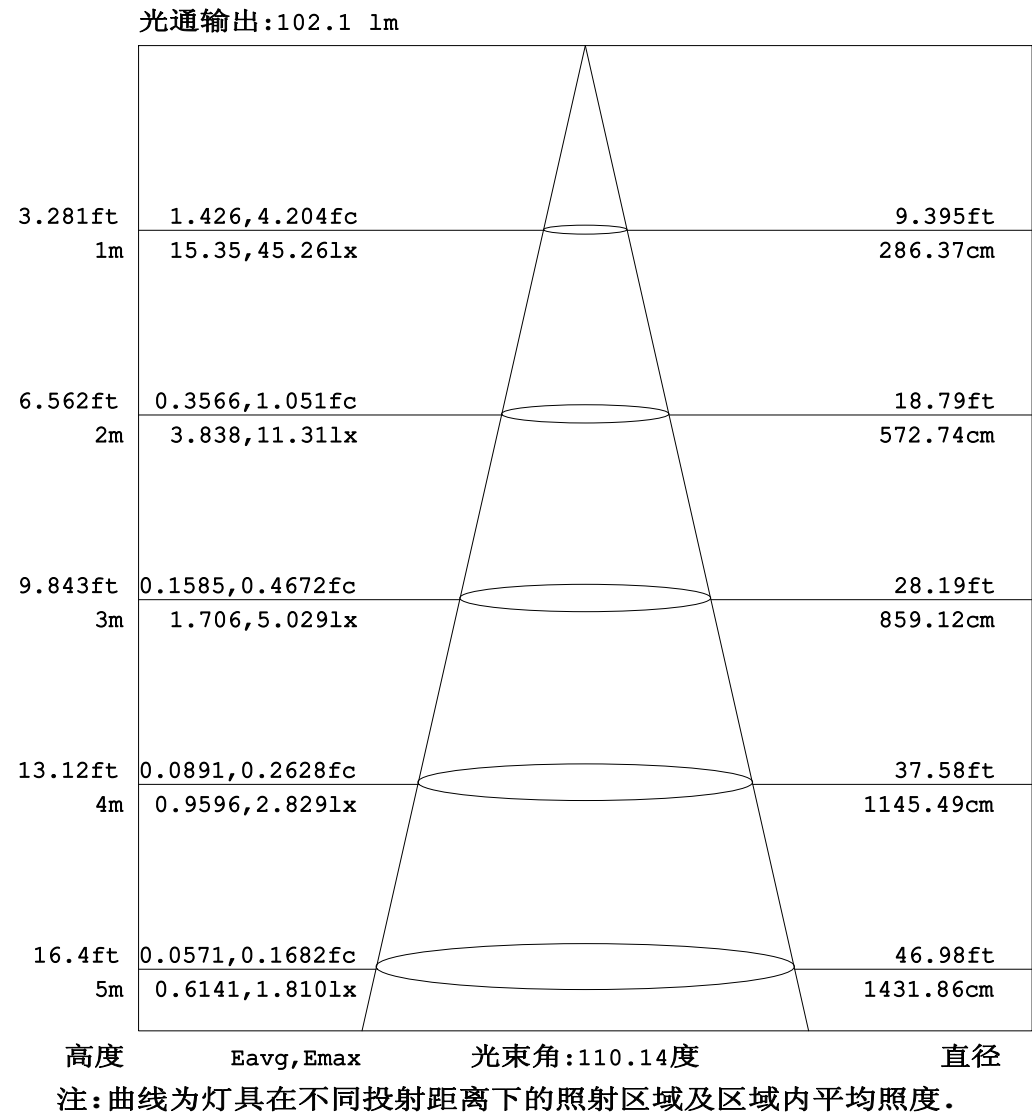


C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度:25℃
测试人员:yechihong
测试日期:2020-06-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.272
环境湿度:70%
测试距离:8.425米 [K=1.0000]
备注:

平面等照度曲线


实测参数: U:230.3V I:0.0614A P:5.980W PF:0.4233 实检光通:149.087x1 lm		
灯具名称: Linear 桌灯	灯具类型:	灯具重量:
外型尺寸:	灯具规格:	测试编号:202000605A0001
制造厂商: TARGET	发光口面:0.22*0.1	保护角:

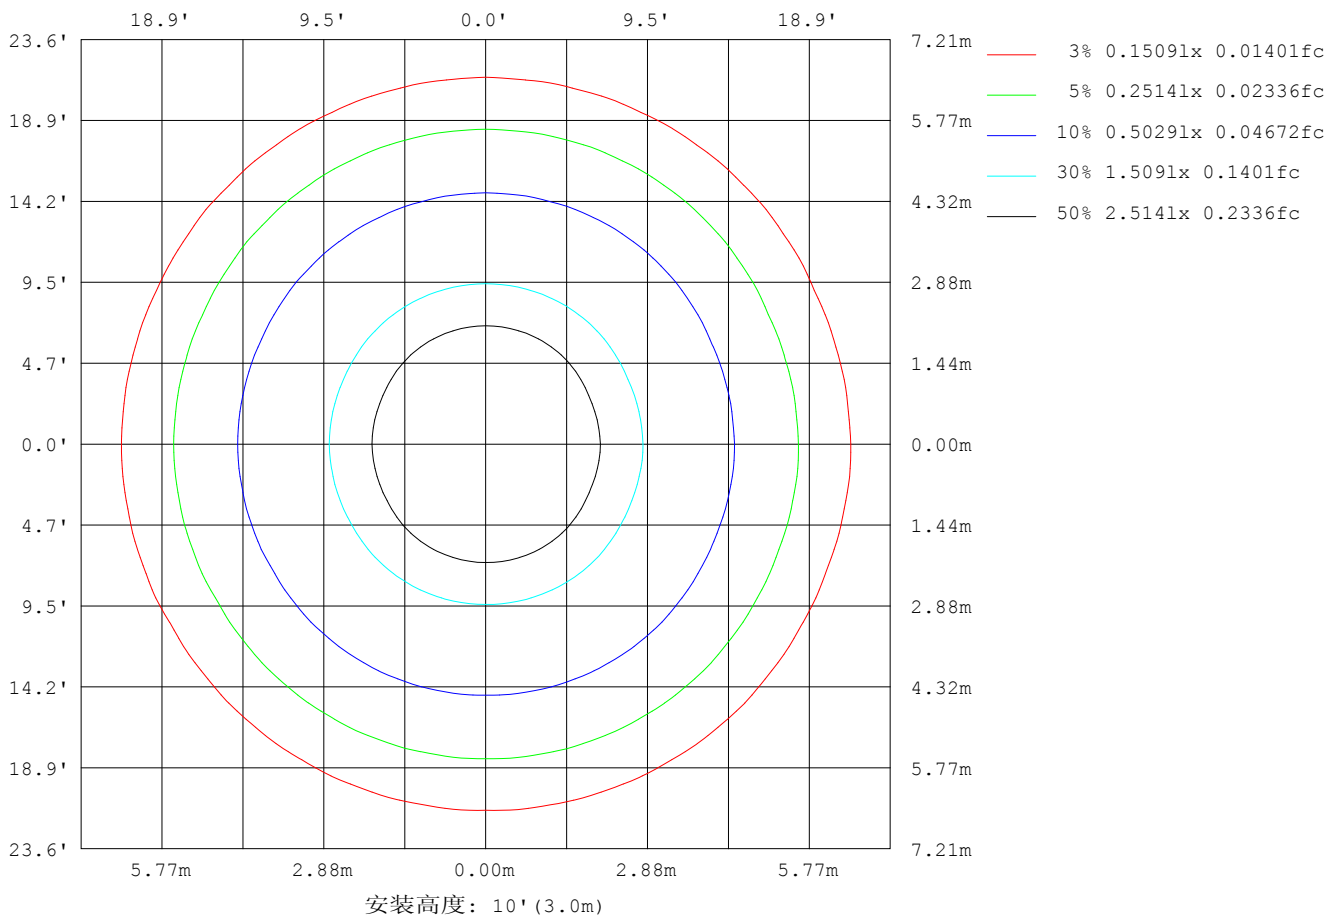

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度: 25℃
测试人员: yechihong
测试日期: 2020-06-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.272
环境湿度: 70%
测试距离: 8.425米 [K=1.0000]
备注:

平面照度曲线

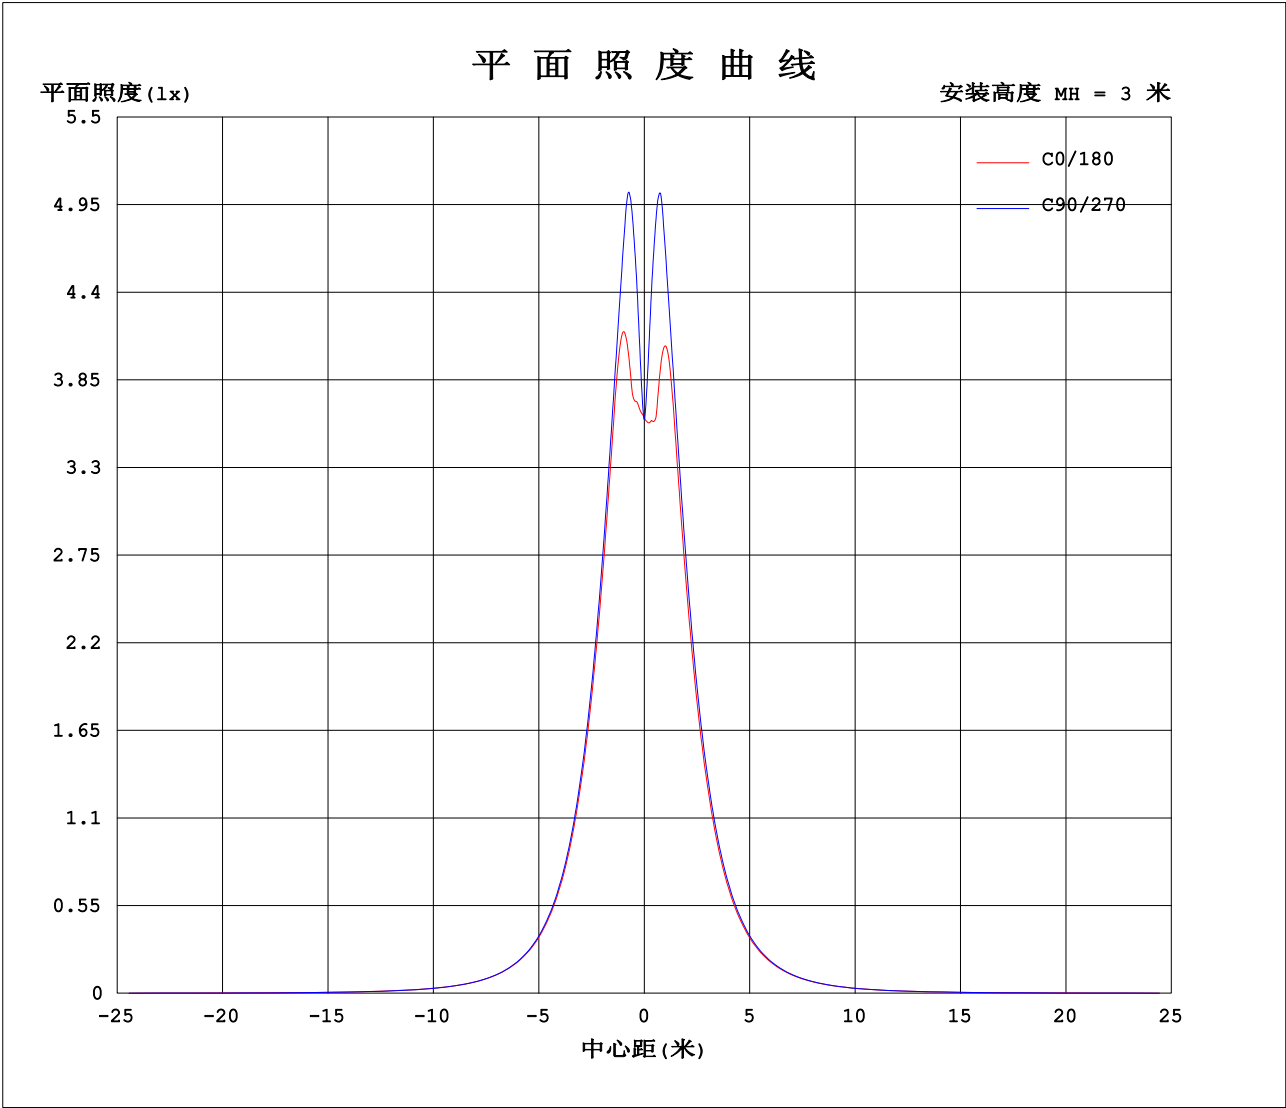

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度: 25℃
测试人员: yechihong
测试日期: 2020-06-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.272
环境湿度: 70%
测试距离: 8.425米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:230.3V I:0.0614A P:5.980W PF:0.4233 实检光通:149.087x1 lm																		
灯具名称: Linear 桌灯									灯具类型:					灯具重量:				
外型尺寸:									灯具规格:					测试编号:202000605A0001				
制造厂商: TARGET									发光口面:0.22*0.1					保护角:				

表--1

单位: cd

C(DEG) γ (DEG)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
0	32.5	32.5	32.5	32.5	32.5	32.5	32.5	32.5	32.4	32.4	32.4	32.4	32.4	32.4	32.4	32.4	32.4	32.4	32.4
5	33.5	33.7	34.1	34.4	34.9	35.2	35.7	36.0	36.4	36.6	37.0	37.3	37.7	37.8	38.1	38.1	38.3	38.2	38.3
10	35.3	35.8	36.7	37.5	38.4	39.1	39.9	40.5	41.3	41.8	42.6	43.2	43.8	44.3	44.8	45.0	45.4	45.4	45.4
15	40.7	40.9	41.4	41.9	42.6	43.1	43.7	44.4	45.1	45.7	46.6	47.4	48.2	48.8	49.3	49.7	49.8	49.9	49.9
20	44.6	44.6	44.7	44.8	44.9	45.2	45.6	46.1	46.7	47.4	47.9	48.2	48.3	48.5	48.6	48.7	48.7	48.7	48.7
25	44.6	44.6	44.5	44.4	44.3	44.4	44.7	45.0	45.4	45.8	46.0	46.2	46.4	46.5	46.6	46.6	46.7	46.7	46.7
30	42.4	42.3	42.2	42.1	42.0	42.1	42.3	42.7	43.0	43.4	43.6	43.8	43.9	44.1	44.1	44.2	44.2	44.3	44.2
35	39.7	39.7	39.5	39.5	39.4	39.5	39.7	40.0	40.3	40.7	40.8	41.0	41.1	41.3	41.3	41.4	41.4	41.4	41.3
40	36.7	36.7	36.6	36.5	36.4	36.6	36.7	37.0	37.2	37.6	37.7	37.9	38.0	38.2	38.1	38.2	38.2	38.3	38.2
45	33.5	33.5	33.4	33.3	33.2	33.3	33.4	33.7	33.9	34.3	34.4	34.5	34.6	34.7	34.7	34.7	34.7	34.8	34.7
50	30.0	30.1	29.9	29.9	29.7	29.9	29.9	30.2	30.3	30.7	30.7	30.9	30.9	31.0	31.0	31.1	31.0	31.1	31.0
55	26.4	26.4	26.2	26.2	26.1	26.2	26.2	26.5	26.6	26.9	26.9	27.1	27.0	27.2	27.1	27.2	27.1	27.2	27.1
60	22.6	22.6	22.5	22.4	22.3	22.4	22.4	22.6	22.6	23.0	22.9	23.1	23.0	23.1	23.1	23.2	23.1	23.1	23.0
65	18.7	18.7	18.5	18.5	18.4	18.5	18.5	18.6	18.6	18.9	18.8	19.0	18.9	19.0	18.9	19.0	18.9	19.0	18.8
70	14.7	14.8	14.6	14.6	14.4	14.5	14.5	14.6	14.6	14.8	14.7	14.8	14.7	14.8	14.7	14.8	14.7	14.8	14.6
75	10.8	10.8	10.7	10.7	10.5	10.6	10.5	10.6	10.5	10.7	10.6	10.7	10.6	10.7	10.5	10.6	10.5	10.6	10.5
80	6.91	6.97	6.81	6.82	6.65	6.68	6.59	6.64	6.52	6.69	6.57	6.62	6.51	6.59	6.47	6.53	6.41	6.49	6.38
85	3.26	3.31	3.15	3.13	2.96	2.98	2.88	2.92	2.80	2.93	2.82	2.86	2.76	2.81	2.71	2.75	2.66	2.72	2.63
90	0.76	0.72	0.75	0.70	0.75	0.69	0.74	0.68	0.73	0.67	0.70	0.64	0.69	0.66	0.70	0.64	0.69	0.64	0.68
95	0.67	0.62	0.66	0.61	0.66	0.61	0.66	0.61	0.66	0.60	0.64	0.60	0.63	0.60	0.64	0.61	0.64	0.60	0.63
100	0.61	0.57	0.60	0.57	0.60	0.57	0.61	0.59	0.62	0.60	0.61	0.58	0.60	0.59	0.61	0.59	0.60	0.59	0.60
105	0.58	0.57	0.57	0.57	0.58	0.57	0.59	0.59	0.59	0.60	0.59	0.58	0.58	0.59	0.59	0.60	0.59	0.60	0.59
110	0.57	0.57	0.56	0.57	0.57	0.57	0.58	0.59	0.58	0.60	0.59	0.58	0.58	0.59	0.59	0.60	0.59	0.60	0.59
115	0.57	0.57	0.55	0.57	0.57	0.58	0.58	0.59	0.58	0.60	0.59	0.60	0.58	0.60	0.59	0.61	0.59	0.61	0.59
120	0.57	0.58	0.55	0.59	0.57	0.59	0.58	0.60	0.58	0.61	0.59	0.61	0.58	0.62	0.59	0.62	0.59	0.63	0.59
125	0.57	0.60	0.55	0.60	0.57	0.60	0.58	0.62	0.59	0.63	0.59	0.62	0.60	0.63	0.60	0.63	0.60	0.64	0.61
130	0.57	0.62	0.57	0.62	0.58	0.62	0.59	0.64	0.61	0.64	0.61	0.64	0.61	0.65	0.61	0.65	0.61	0.66	0.61
135	0.61	0.65	0.62	0.65	0.61	0.66	0.61	0.65	0.62	0.66	0.62	0.66	0.62	0.67	0.62	0.67	0.63	0.67	0.62
140	0.62	0.68	0.62	0.67	0.62	0.68	0.62	0.67	0.63	0.68	0.63	0.67	0.63	0.69	0.64	0.69	0.64	0.69	0.64
145	0.65	0.68	0.64	0.68	0.66	0.68	0.64	0.69	0.66	0.70	0.66	0.70	0.68	0.70	0.67	0.70	0.67	0.71	0.67
150	0.67	0.68	0.67	0.68	0.69	0.68	0.67	0.69	0.68	0.70	0.68	0.70	0.70	0.70	0.68	0.70	0.68	0.71	0.68
155	0.68	0.67	0.68	0.68	0.69	0.68	0.68	0.69	0.69	0.70	0.69	0.70	0.70	0.70	0.69	0.70	0.70	0.71	0.70
160	0.64	0.60	0.64	0.60	0.66	0.62	0.68	0.65	0.69	0.69	0.70	0.68	0.70	0.70	0.70	0.71	0.71	0.71	0.71
165	0.48	0.44	0.49	0.47	0.54	0.52	0.58	0.54	0.61	0.57	0.65	0.61	0.67	0.63	0.69	0.64	0.69	0.64	0.70
170	0.44	0.43	0.43	0.43	0.45	0.44	0.47	0.44	0.50	0.47	0.53	0.48	0.55	0.52	0.57	0.52	0.58	0.53	0.58
175	0.44	0.43	0.43	0.43	0.44	0.44	0.44	0.44	0.44	0.43	0.43	0.43	0.44	0.43	0.44	0.43	0.45	0.44	0.45
180	0.44	0.44	0.43	0.43	0.44	0.44	0.44	0.44	0.43	0.43	0.44	0.43	0.44	0.43	0.43	0.43	0.44	0.44	0.43

C角度范围: 0度 - 360度

C角度间隔: 5.0度

测试速度: 快速

环境温度:25℃

测试人员:yechihong

测试日期:2020-06-05

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.272

环境湿度:70%

测试距离:8.425米 [K=1.0000]

备注:

光 强 分 布 数 据 表 格

实测参数: U:230.3V I:0.0614A P:5.980W PF:0.4233 实检光通:149.087x1 lm																		
灯具名称: Linear 桌灯									灯具类型:					灯具重量:				
外型尺寸:									灯具规格:					测试编号:202000605A0001				
制造厂商: TARGET									发光口面:0.22*0.1					保护角:				

表--2										单位: cd									
C(DEG) γ (DEG)	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185
0	32.4	32.4	32.4	32.4	32.4	32.4	32.3	32.4	32.3	32.3	32.4	32.4	32.5	32.5	32.4	32.5	32.4	32.5	32.5
5	38.0	38.0	37.7	37.5	37.1	36.8	36.3	36.0	35.5	35.1	34.5	34.0	33.3	33.0	32.6	32.4	32.4	32.6	32.5
10	45.2	45.1	44.6	44.2	43.5	42.9	42.2	41.4	40.6	39.8	38.9	38.1	36.9	36.1	35.1	34.4	33.8	34.0	34.1
15	49.8	49.6	49.2	48.8	48.1	47.4	46.6	45.8	44.9	44.1	43.2	42.7	41.6	41.0	40.3	39.9	39.5	39.6	39.7
20	48.6	48.5	48.4	48.3	48.2	48.0	47.7	47.3	46.7	46.0	45.4	44.8	44.4	44.1	43.9	43.8	43.7	43.8	43.9
25	46.7	46.6	46.5	46.3	46.2	46.0	45.8	45.5	45.2	44.8	44.4	44.0	44.0	43.8	43.8	43.9	43.9	44.1	44.0
30	44.2	44.1	44.0	43.9	43.8	43.6	43.4	43.1	42.9	42.5	42.1	41.7	41.7	41.5	41.6	41.6	41.6	41.8	41.8
35	41.4	41.2	41.2	41.1	41.0	40.8	40.6	40.4	40.2	39.8	39.4	39.1	39.1	39.0	39.0	39.0	39.1	39.2	39.1
40	38.2	38.1	38.1	37.9	37.9	37.7	37.5	37.3	37.1	36.8	36.5	36.2	36.2	36.1	36.1	36.1	36.2	36.3	36.2
45	34.7	34.6	34.6	34.5	34.5	34.3	34.2	34.0	33.8	33.5	33.3	33.0	33.1	32.9	33.0	32.9	33.0	33.1	33.0
50	31.1	30.9	30.9	30.8	30.8	30.6	30.6	30.4	30.3	30.0	29.8	29.5	29.7	29.5	29.6	29.5	29.6	29.7	29.6
55	27.1	27.0	27.1	26.9	27.0	26.8	26.8	26.6	26.5	26.2	26.2	25.9	26.1	25.9	26.0	25.9	26.1	26.1	26.0
60	23.1	22.9	23.0	22.9	23.0	22.8	22.8	22.6	22.6	22.4	22.3	22.1	22.3	22.2	22.3	22.2	22.3	22.3	22.3
65	18.9	18.8	18.9	18.8	18.9	18.7	18.7	18.6	18.6	18.4	18.4	18.2	18.5	18.3	18.5	18.4	18.5	18.5	18.4
70	14.7	14.6	14.7	14.6	14.7	14.5	14.6	14.5	14.5	14.4	14.4	14.3	14.6	14.5	14.6	14.5	14.6	14.6	14.5
75	10.5	10.4	10.5	10.4	10.5	10.4	10.5	10.4	10.5	10.4	10.5	10.4	10.7	10.6	10.7	10.7	10.8	10.7	10.6
80	6.47	6.37	6.47	6.37	6.49	6.38	6.48	6.41	6.52	6.43	6.55	6.48	6.80	6.75	6.91	6.86	6.96	6.93	6.85
85	2.70	2.62	2.71	2.63	2.73	2.66	2.75	2.70	2.80	2.74	2.87	2.82	3.14	3.11	3.26	3.23	3.35	3.30	3.24
90	0.64	0.69	0.64	0.70	0.64	0.69	0.63	0.69	0.66	0.72	0.67	0.73	0.69	0.74	0.69	0.74	0.69	0.65	0.69
95	0.59	0.63	0.59	0.63	0.60	0.63	0.58	0.63	0.60	0.64	0.60	0.64	0.60	0.64	0.60	0.64	0.60	0.57	0.61
100	0.59	0.60	0.59	0.60	0.59	0.59	0.58	0.60	0.59	0.61	0.58	0.59	0.57	0.59	0.56	0.59	0.55	0.54	0.57
105	0.59	0.59	0.59	0.59	0.59	0.58	0.58	0.58	0.59	0.59	0.58	0.58	0.57	0.57	0.56	0.56	0.55	0.54	0.54
110	0.60	0.59	0.60	0.59	0.59	0.58	0.58	0.58	0.59	0.58	0.58	0.57	0.57	0.56	0.56	0.55	0.55	0.54	0.53
115	0.61	0.59	0.61	0.59	0.61	0.58	0.60	0.58	0.60	0.58	0.59	0.57	0.57	0.56	0.57	0.55	0.56	0.54	0.53
120	0.62	0.59	0.62	0.59	0.62	0.58	0.61	0.58	0.61	0.58	0.60	0.57	0.59	0.56	0.58	0.55	0.57	0.56	0.53
125	0.64	0.61	0.64	0.61	0.63	0.58	0.63	0.59	0.62	0.59	0.62	0.57	0.61	0.56	0.60	0.55	0.59	0.58	0.53
130	0.66	0.61	0.66	0.61	0.65	0.61	0.64	0.61	0.64	0.60	0.64	0.60	0.62	0.57	0.62	0.57	0.62	0.59	0.54
135	0.67	0.63	0.67	0.62	0.67	0.62	0.67	0.62	0.66	0.62	0.67	0.60	0.66	0.61	0.64	0.60	0.65	0.62	0.57
140	0.69	0.65	0.69	0.64	0.69	0.63	0.68	0.63	0.68	0.63	0.69	0.63	0.68	0.62	0.66	0.62	0.67	0.65	0.60
145	0.72	0.68	0.71	0.66	0.71	0.67	0.70	0.67	0.70	0.67	0.70	0.66	0.69	0.64	0.68	0.64	0.68	0.67	0.62
150	0.71	0.68	0.71	0.68	0.71	0.68	0.71	0.67	0.70	0.68	0.70	0.67	0.69	0.67	0.68	0.67	0.68	0.67	0.64
155	0.71	0.70	0.71	0.70	0.71	0.69	0.71	0.70	0.70	0.70	0.70	0.69	0.69	0.68	0.68	0.68	0.67	0.66	0.67
160	0.72	0.72	0.71	0.71	0.71	0.70	0.70	0.70	0.67	0.70	0.65	0.70	0.63	0.66	0.60	0.64	0.58	0.57	0.62
165	0.64	0.69	0.64	0.69	0.63	0.67	0.62	0.66	0.59	0.62	0.55	0.59	0.52	0.55	0.48	0.50	0.44	0.42	0.48
170	0.53	0.58	0.52	0.58	0.52	0.56	0.50	0.53	0.47	0.51	0.45	0.48	0.44	0.46	0.43	0.44	0.44	0.42	0.43
175	0.43	0.45	0.44	0.45	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.43	0.44	0.44	0.42	0.43
180	0.43	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.44	0.43	0.44	0.44	0.42	0.43

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度:25℃
测试人员:yechihong
测试日期:2020-06-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.272
环境湿度:70%
测试距离:8.425米 [K=1.0000]
备注:

光 强 分 布 数 据 表 格

实测参数: U:230.3V I:0.0614A P:5.980W PF:0.4233 实检光通:149.087x1 lm																		
灯具名称: Linear 桌灯									灯具类型:					灯具重量:				
外型尺寸:									灯具规格:					测试编号:202000605A0001				
制造厂商: TARGET									发光口面:0.22*0.1					保护角:				

表--3										单位: cd									
C(DEG) γ (DEG)	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280
0	32.5	32.5	32.5	32.5	32.5	32.5	32.4	32.4	32.4	32.4	32.4	32.4	32.4	32.4	32.4	32.4	32.4	32.4	32.4
5	32.7	32.9	33.2	33.7	34.1	34.7	35.1	35.7	36.1	36.5	36.8	37.3	37.5	37.8	37.9	38.1	38.1	38.3	38.1
10	34.8	35.7	36.5	37.5	38.3	39.1	39.9	40.9	41.6	42.4	43.1	43.7	44.2	44.7	45.0	45.3	45.3	45.4	45.2
15	40.0	40.6	41.2	42.1	42.8	43.6	44.3	45.3	46.0	46.9	47.7	48.4	49.0	49.4	49.7	49.8	49.9	49.9	49.8
20	43.9	44.1	44.3	44.6	45.1	45.6	46.3	47.0	47.5	47.8	48.1	48.2	48.4	48.5	48.6	48.6	48.6	48.6	48.6
25	43.9	43.9	43.9	44.0	44.3	44.6	45.0	45.3	45.6	45.8	46.1	46.2	46.4	46.4	46.5	46.6	46.6	46.5	46.6
30	41.7	41.7	41.7	41.8	42.0	42.3	42.7	42.9	43.2	43.4	43.7	43.8	43.9	44.0	44.1	44.1	44.2	44.1	44.1
35	39.1	39.1	39.1	39.1	39.4	39.6	40.0	40.2	40.5	40.7	40.9	41.0	41.1	41.2	41.3	41.3	41.3	41.3	41.3
40	36.2	36.2	36.2	36.2	36.4	36.6	37.0	37.1	37.4	37.6	37.8	37.8	38.0	38.0	38.1	38.1	38.2	38.1	38.2
45	33.1	33.0	33.0	33.0	33.2	33.4	33.8	33.8	34.1	34.2	34.4	34.4	34.6	34.6	34.7	34.6	34.7	34.7	34.7
50	29.7	29.6	29.6	29.6	29.8	29.9	30.2	30.2	30.5	30.6	30.7	30.7	30.9	30.9	31.0	31.0	31.0	31.0	31.0
55	26.1	26.0	26.0	25.9	26.1	26.2	26.5	26.5	26.7	26.7	26.9	26.9	27.0	27.0	27.1	27.1	27.2	27.1	27.2
60	22.3	22.2	22.3	22.2	22.3	22.4	22.6	22.6	22.8	22.8	22.9	22.9	23.0	23.0	23.1	23.0	23.1	23.0	23.1
65	18.5	18.4	18.4	18.3	18.4	18.4	18.7	18.5	18.7	18.7	18.8	18.8	18.9	18.8	18.9	18.9	19.0	18.9	19.0
70	14.6	14.5	14.5	14.4	14.5	14.4	14.6	14.5	14.6	14.5	14.7	14.6	14.7	14.6	14.7	14.7	14.8	14.7	14.8
75	10.7	10.6	10.6	10.5	10.5	10.5	10.6	10.4	10.5	10.4	10.5	10.4	10.6	10.5	10.6	10.5	10.6	10.5	10.6
80	6.91	6.78	6.81	6.64	6.66	6.55	6.64	6.44	6.53	6.43	6.51	6.42	6.51	6.42	6.50	6.42	6.52	6.45	6.55
85	3.27	3.13	3.14	2.98	2.98	2.86	2.92	2.73	2.78	2.70	2.76	2.67	2.74	2.66	2.73	2.66	2.74	2.68	2.77
90	0.65	0.70	0.64	0.68	0.63	0.68	0.62	0.65	0.58	0.63	0.59	0.64	0.59	0.64	0.59	0.63	0.57	0.64	0.59
95	0.56	0.61	0.57	0.61	0.56	0.61	0.56	0.59	0.55	0.58	0.55	0.59	0.56	0.60	0.56	0.58	0.56	0.59	0.56
100	0.53	0.57	0.54	0.57	0.55	0.57	0.56	0.57	0.55	0.56	0.55	0.57	0.56	0.57	0.56	0.57	0.56	0.57	0.56
105	0.53	0.54	0.54	0.55	0.55	0.55	0.56	0.56	0.55	0.55	0.55	0.56	0.56	0.56	0.56	0.56	0.56	0.57	0.56
110	0.53	0.53	0.54	0.54	0.55	0.55	0.57	0.56	0.56	0.55	0.55	0.56	0.57	0.56	0.57	0.56	0.57	0.56	0.57
115	0.54	0.53	0.54	0.54	0.55	0.55	0.57	0.56	0.57	0.55	0.56	0.56	0.57	0.56	0.58	0.56	0.58	0.56	0.58
120	0.55	0.53	0.55	0.54	0.57	0.55	0.58	0.56	0.57	0.56	0.58	0.56	0.59	0.56	0.59	0.56	0.59	0.56	0.59
125	0.57	0.54	0.58	0.54	0.58	0.55	0.59	0.56	0.59	0.56	0.59	0.57	0.60	0.56	0.60	0.56	0.60	0.56	0.61
130	0.59	0.54	0.59	0.54	0.60	0.56	0.61	0.56	0.62	0.56	0.61	0.57	0.62	0.57	0.62	0.57	0.62	0.57	0.62
135	0.61	0.57	0.62	0.57	0.62	0.59	0.62	0.61	0.63	0.58	0.63	0.61	0.64	0.60	0.64	0.59	0.64	0.61	0.63
140	0.64	0.60	0.64	0.61	0.65	0.62	0.65	0.62	0.65	0.60	0.65	0.62	0.66	0.61	0.66	0.61	0.66	0.61	0.66
145	0.67	0.62	0.67	0.62	0.67	0.62	0.67	0.62	0.67	0.62	0.67	0.63	0.68	0.63	0.68	0.63	0.68	0.63	0.67
150	0.67	0.67	0.68	0.64	0.67	0.65	0.68	0.66	0.68	0.65	0.68	0.65	0.69	0.66	0.69	0.65	0.69	0.65	0.68
155	0.66	0.69	0.67	0.67	0.67	0.68	0.68	0.67	0.68	0.67	0.68	0.67	0.69	0.68	0.69	0.68	0.69	0.67	0.68
160	0.58	0.64	0.61	0.66	0.62	0.68	0.64	0.68	0.67	0.69	0.68	0.69	0.68	0.69	0.69	0.69	0.69	0.69	0.68
165	0.46	0.52	0.49	0.56	0.53	0.58	0.56	0.62	0.59	0.65	0.61	0.67	0.62	0.68	0.62	0.68	0.62	0.67	0.62
170	0.43	0.44	0.43	0.46	0.44	0.48	0.46	0.51	0.47	0.53	0.49	0.55	0.53	0.57	0.52	0.56	0.52	0.56	0.52
175	0.43	0.43	0.43	0.44	0.44	0.43	0.43	0.43	0.43	0.44	0.43	0.44	0.44	0.44	0.43	0.44	0.43	0.44	0.43
180	0.43	0.43	0.43	0.44	0.44	0.43	0.43	0.43	0.43	0.43	0.43	0.44	0.44	0.43	0.43	0.43	0.43	0.43	0.43

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度:25℃
测试人员:yechihong
测试日期:2020-06-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.272
环境湿度:70%
测试距离:8.425米 [K=1.0000]
备注:

光强分布数据表格

实测参数: U:230.3V I:0.0614A P:5.980W PF:0.4233 实检光通:149.087x1 lm																	
灯具名称: Linear 桌灯									灯具类型:						灯具重量:		
外型尺寸:									灯具规格:						测试编号:202000605A0001		
制造厂商: TARGET									发光口面:0.22*0.1						保护角:		

表--4

单位: cd

C(DEG) γ (DEG)	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355				
0	32.4	32.4	32.4	32.4	32.3	32.4	32.3	32.3	32.4	32.4	32.5	32.5	32.4	32.5	32.4				
5	38.1	37.8	37.9	37.5	37.3	36.9	36.6	36.2	35.8	35.3	35.3	34.8	34.4	34.0	33.6				
10	45.0	44.6	44.2	43.6	43.1	42.4	41.7	40.9	40.3	39.5	39.1	38.2	37.4	36.4	35.7				
15	49.6	49.2	48.7	48.0	47.3	46.4	45.6	44.8	44.1	43.4	43.0	42.3	41.8	41.1	40.6				
20	48.5	48.5	48.4	48.2	48.0	47.7	47.2	46.5	45.9	45.4	45.0	44.8	44.6	44.5	44.4				
25	46.5	46.5	46.3	46.2	46.0	45.8	45.6	45.2	44.8	44.5	44.2	44.2	44.2	44.3	44.4				
30	44.1	44.0	43.9	43.8	43.6	43.4	43.2	42.9	42.5	42.2	41.9	41.9	41.9	42.1	42.1				
35	41.2	41.2	41.1	41.0	40.8	40.7	40.4	40.2	39.8	39.6	39.3	39.3	39.3	39.4	39.5				
40	38.1	38.1	38.0	37.9	37.8	37.6	37.4	37.2	36.8	36.6	36.3	36.3	36.4	36.5	36.5				
45	34.6	34.7	34.5	34.6	34.4	34.3	34.1	33.9	33.6	33.4	33.1	33.1	33.2	33.3	33.3				
50	31.0	31.0	30.9	30.9	30.7	30.7	30.5	30.3	30.0	29.9	29.6	29.7	29.7	29.9	29.8				
55	27.1	27.2	27.0	27.1	26.9	26.9	26.7	26.6	26.4	26.3	26.0	26.1	26.1	26.2	26.2				
60	23.0	23.2	23.0	23.1	22.9	22.9	22.8	22.7	22.5	22.5	22.2	22.3	22.3	22.4	22.4				
65	18.9	19.0	18.9	19.0	18.8	18.9	18.7	18.8	18.5	18.6	18.2	18.4	18.4	18.5	18.5				
70	14.7	14.8	14.7	14.8	14.7	14.8	14.7	14.7	14.5	14.6	14.3	14.5	14.4	14.6	14.5				
75	10.5	10.7	10.6	10.7	10.6	10.7	10.6	10.7	10.5	10.6	10.4	10.5	10.5	10.7	10.6				
80	6.47	6.59	6.51	6.63	6.56	6.67	6.60	6.73	6.62	6.75	6.53	6.70	6.69	6.85	6.80				
85	2.71	2.82	2.75	2.87	2.83	2.93	2.87	2.99	2.92	3.05	2.86	3.02	3.02	3.19	3.17				
90	0.64	0.61	0.65	0.60	0.65	0.61	0.68	0.64	0.69	0.65	0.70	0.66	0.71	0.67	0.71				
95	0.59	0.57	0.60	0.56	0.60	0.57	0.62	0.58	0.62	0.58	0.63	0.57	0.62	0.57	0.62				
100	0.57	0.57	0.58	0.56	0.58	0.57	0.59	0.57	0.59	0.55	0.59	0.54	0.57	0.54	0.57				
105	0.56	0.57	0.57	0.56	0.57	0.57	0.57	0.57	0.57	0.55	0.56	0.54	0.56	0.54	0.54				
110	0.56	0.57	0.57	0.56	0.57	0.57	0.57	0.57	0.56	0.55	0.55	0.55	0.54	0.54	0.53				
115	0.56	0.57	0.57	0.57	0.57	0.58	0.57	0.57	0.56	0.56	0.55	0.56	0.54	0.54	0.53				
120	0.56	0.58	0.57	0.58	0.57	0.59	0.57	0.58	0.56	0.57	0.55	0.57	0.54	0.55	0.53				
125	0.56	0.60	0.57	0.59	0.57	0.60	0.57	0.60	0.56	0.58	0.55	0.57	0.54	0.57	0.53				
130	0.57	0.62	0.57	0.62	0.57	0.62	0.57	0.61	0.56	0.60	0.55	0.59	0.54	0.59	0.53				
135	0.59	0.63	0.61	0.63	0.61	0.64	0.60	0.64	0.57	0.62	0.57	0.62	0.57	0.61	0.56				
140	0.61	0.65	0.61	0.65	0.61	0.66	0.61	0.65	0.61	0.65	0.60	0.65	0.61	0.64	0.61				
145	0.62	0.67	0.63	0.67	0.62	0.68	0.63	0.67	0.62	0.67	0.62	0.67	0.62	0.67	0.61				
150	0.64	0.68	0.65	0.68	0.65	0.68	0.65	0.67	0.65	0.67	0.65	0.67	0.64	0.67	0.63				
155	0.67	0.68	0.68	0.68	0.67	0.68	0.68	0.67	0.67	0.67	0.67	0.66	0.67	0.65	0.67				
160	0.68	0.68	0.68	0.68	0.68	0.67	0.68	0.63	0.67	0.62	0.66	0.59	0.63	0.57	0.61				
165	0.68	0.62	0.67	0.61	0.64	0.59	0.62	0.55	0.58	0.52	0.54	0.47	0.49	0.43	0.46				
170	0.56	0.51	0.55	0.49	0.53	0.47	0.50	0.44	0.47	0.43	0.45	0.43	0.43	0.43	0.42				
175	0.44	0.43	0.43	0.44	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.42				
180	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.42				

C角度范围: 0度 - 360度

C角度间隔: 5.0度

测试速度: 快速

环境温度:25℃

测试人员:yechihong

测试日期:2020-06-05

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.272

环境湿度:70%

测试距离:8.425米 [K=1.0000]

备注:

Photometric Data Table [cd]

G/C	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0
0.0	32.52	32.55	32.49	32.50	32.48	32.49	32.47	32.45	32.43	32.43
2.5	32.88	32.97	33.08	33.22	33.40	33.50	33.71	33.77	34.02	33.98
5.0	33.54	33.73	34.08	34.40	34.88	35.20	35.69	36.03	36.45	36.63
7.5	34.32	34.66	35.24	35.84	36.57	37.16	37.87	38.39	39.06	39.46
10.0	35.27	35.84	36.72	37.48	38.42	39.07	39.91	40.53	41.31	41.80
12.5	37.78	38.22	39.00	39.75	40.60	41.19	41.99	42.62	43.42	43.95
15.0	40.66	40.90	41.42	41.92	42.62	43.14	43.74	44.37	45.13	45.75
17.5	43.07	43.10	43.45	43.67	44.11	44.50	45.01	45.59	46.26	46.94
20.0	44.61	44.59	44.67	44.76	44.94	45.22	45.59	46.14	46.74	47.39
22.5	45.11	45.06	45.02	44.98	45.05	45.18	45.54	46.01	46.43	46.82
25.0	44.65	44.59	44.47	44.37	44.31	44.41	44.68	45.04	45.39	45.76
27.5	43.54	43.49	43.36	43.29	43.21	43.33	43.54	43.90	44.25	44.61
30.0	42.37	42.33	42.18	42.10	42.02	42.13	42.35	42.71	43.01	43.38
32.5	41.07	41.03	40.88	40.82	40.72	40.86	41.04	41.39	41.68	42.05
35.0	39.70	39.68	39.53	39.48	39.36	39.47	39.67	40.02	40.27	40.66
37.5	38.27	38.25	38.10	38.06	37.92	38.09	38.22	38.59	38.78	39.16
40.0	36.73	36.73	36.56	36.53	36.40	36.56	36.67	37.03	37.22	37.60
42.5	35.14	35.16	34.99	34.96	34.83	34.98	35.10	35.42	35.59	35.99
45.0	33.52	33.54	33.35	33.33	33.18	33.31	33.45	33.73	33.89	34.26
47.5	31.80	31.82	31.66	31.64	31.49	31.61	31.73	32.00	32.13	32.50
50.0	30.02	30.08	29.89	29.88	29.73	29.86	29.94	30.21	30.32	30.68
52.5	28.21	28.28	28.09	28.08	27.93	28.07	28.12	28.38	28.47	28.82
55.0	26.36	26.42	26.24	26.23	26.08	26.20	26.24	26.48	26.57	26.90
57.5	24.48	24.53	24.36	24.36	24.22	24.32	24.33	24.59	24.62	24.95
60.0	22.55	22.61	22.45	22.44	22.28	22.40	22.40	22.63	22.64	22.95
62.5	20.61	20.65	20.49	20.50	20.34	20.46	20.45	20.64	20.64	20.92
65.0	18.66	18.71	18.53	18.54	18.38	18.51	18.46	18.64	18.63	18.89
67.5	16.67	16.72	16.56	16.57	16.42	16.51	16.49	16.63	16.58	16.85
70.0	14.70	14.76	14.59	14.61	14.45	14.52	14.46	14.61	14.56	14.80
72.5	12.72	12.78	12.60	12.63	12.47	12.54	12.48	12.60	12.51	12.75
75.0	10.76	10.83	10.66	10.68	10.52	10.58	10.50	10.58	10.50	10.70
77.5	8.821	8.885	8.722	8.735	8.562	8.625	8.539	8.607	8.497	8.683
80.0	6.912	6.972	6.812	6.817	6.646	6.677	6.593	6.641	6.520	6.691
82.5	5.065	5.111	4.967	4.961	4.779	4.811	4.704	4.744	4.620	4.769
85.0	3.255	3.307	3.146	3.135	2.958	2.983	2.883	2.916	2.797	2.929
87.5	1.555	1.574	1.444	1.440	1.320	1.348	1.290	1.306	1.240	1.330
90.0	0.7610	0.7190	0.7518	0.7016	0.7517	0.6925	0.7429	0.6834	0.7250	0.6699
92.5	0.7064	0.6608	0.7017	0.6562	0.6976	0.6427	0.6927	0.6382	0.6837	0.6202
95.0	0.6655	0.6156	0.6612	0.6107	0.6609	0.6111	0.6564	0.6065	0.6609	0.6021
97.5	0.6338	0.5885	0.6247	0.5928	0.6293	0.5884	0.6338	0.5885	0.6294	0.5975
100.0	0.6066	0.5704	0.6019	0.5704	0.6021	0.5704	0.6111	0.5885	0.6157	0.5975
102.5	0.5886	0.5704	0.5752	0.5704	0.5885	0.5704	0.5931	0.5885	0.6065	0.5975
105.0	0.5794	0.5704	0.5659	0.5704	0.5794	0.5704	0.5885	0.5885	0.5887	0.5975
107.5	0.5704	0.5704	0.5613	0.5704	0.5749	0.5704	0.5797	0.5885	0.5885	0.5975
110.0	0.5704	0.5704	0.5568	0.5704	0.5749	0.5705	0.5794	0.5885	0.5840	0.5975
112.5	0.5659	0.5704	0.5612	0.5749	0.5749	0.5749	0.5794	0.5885	0.5840	0.5976
115.0	0.5659	0.5749	0.5523	0.5749	0.5749	0.5794	0.5794	0.5885	0.5840	0.6021
117.5	0.5659	0.5794	0.5523	0.5794	0.5749	0.5840	0.5794	0.5975	0.5840	0.6066
120.0	0.5659	0.5840	0.5523	0.5930	0.5749	0.5886	0.5794	0.6021	0.5794	0.6112
122.5	0.5659	0.5886	0.5523	0.5975	0.5749	0.6020	0.5794	0.6112	0.5794	0.6203
125.0	0.5659	0.6022	0.5523	0.6021	0.5749	0.6022	0.5794	0.6157	0.5885	0.6292
127.5	0.5659	0.6111	0.5566	0.6112	0.5749	0.6111	0.5794	0.6247	0.6065	0.6383
130.0	0.5749	0.6248	0.5703	0.6248	0.5839	0.6249	0.5930	0.6383	0.6066	0.6429
132.5	0.5976	0.6428	0.6065	0.6428	0.6110	0.6428	0.6066	0.6429	0.6066	0.6519
135.0	0.6110	0.6474	0.6155	0.6519	0.6066	0.6564	0.6066	0.6521	0.6156	0.6610
137.5	0.6153	0.6611	0.6111	0.6609	0.6111	0.6609	0.6111	0.6654	0.6202	0.6790
140.0	0.6202	0.6790	0.6247	0.6700	0.6247	0.6789	0.6202	0.6745	0.6291	0.6836
142.5	0.6338	0.6836	0.6336	0.6836	0.6383	0.6790	0.6337	0.6926	0.6383	0.6883
145.0	0.6518	0.6836	0.6428	0.6836	0.6563	0.6790	0.6428	0.6881	0.6609	0.6971
147.5	0.6608	0.6836	0.6610	0.6836	0.6745	0.6790	0.6609	0.6881	0.6836	0.6971
150.0	0.6745	0.6836	0.6747	0.6836	0.6881	0.6790	0.6700	0.6881	0.6836	0.6971
152.5	0.6879	0.6836	0.6790	0.6836	0.6881	0.6790	0.6745	0.6881	0.6836	0.6971
155.0	0.6836	0.6743	0.6790	0.6790	0.6926	0.6789	0.6836	0.6882	0.6925	0.6971
157.5	0.6836	0.6382	0.6790	0.6427	0.6926	0.6743	0.6836	0.6745	0.6881	0.6926
160.0	0.6384	0.6013	0.6430	0.5974	0.6565	0.6244	0.6836	0.6472	0.6881	0.6880
162.5	0.5574	0.5160	0.5662	0.5339	0.6067	0.5703	0.6383	0.6066	0.6613	0.6246
165.0	0.4800	0.4390	0.4892	0.4704	0.5387	0.5160	0.5795	0.5432	0.6112	0.5749
167.5	0.4436	0.4346	0.4391	0.4346	0.4889	0.4571	0.5206	0.4888	0.5572	0.5205
170.0	0.4436	0.4346	0.4346	0.4346	0.4482	0.4391	0.4663	0.4436	0.4982	0.4662
172.5	0.4436	0.4346	0.4346	0.4346	0.4391	0.4391	0.4392	0.4391	0.4440	0.4346
175.0	0.4436	0.4346	0.4346	0.4346	0.4391	0.4391	0.4391	0.4391	0.4346	0.4346
177.5	0.4436	0.4346	0.4346	0.4346	0.4391	0.4391	0.4391	0.4391	0.4346	0.4346
180.0	0.4436	0.4391	0.4346	0.4346	0.4391	0.4391	0.4391	0.4391	0.4346	0.4346

C角度范围: 0度 - 360度

C角度间隔: 5.0度

测试速度: 快速

环境温度: 25℃

测试人员: yechihong

测试日期: 2020-06-05

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.272

环境湿度: 70%

测试距离: 8.425米 [K=1.0000]

备注:

Photometric Data Table [cd]

G/C	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0	90.0	95.0
0.0	32.42	32.42	32.44	32.44	32.44	32.44	32.44	32.43	32.43	32.37
2.5	34.14	34.21	34.37	34.39	34.54	34.50	34.57	34.47	34.51	34.35
5.0	37.05	37.27	37.65	37.75	38.07	38.06	38.28	38.16	38.27	38.03
7.5	40.05	40.47	40.96	41.25	41.65	41.80	42.04	42.01	42.08	41.84
10.0	42.56	43.17	43.80	44.25	44.77	45.02	45.36	45.37	45.45	45.23
12.5	44.83	45.51	46.30	46.89	47.51	47.87	48.20	48.27	48.34	48.14
15.0	46.63	47.38	48.17	48.78	49.30	49.65	49.84	49.92	49.91	49.82
17.5	47.69	48.38	48.95	49.26	49.41	49.49	49.52	49.52	49.50	49.47
20.0	47.94	48.17	48.35	48.50	48.59	48.65	48.71	48.70	48.67	48.63
22.5	47.04	47.26	47.44	47.56	47.64	47.75	47.75	47.76	47.73	47.72
25.0	45.99	46.23	46.36	46.49	46.56	46.65	46.67	46.70	46.66	46.65
27.5	44.84	45.07	45.18	45.34	45.40	45.50	45.49	45.53	45.48	45.48
30.0	43.59	43.83	43.89	44.09	44.12	44.21	44.20	44.26	44.19	44.20
32.5	42.25	42.48	42.53	42.73	42.76	42.86	42.82	42.91	42.80	42.83
35.0	40.83	41.04	41.08	41.29	41.29	41.39	41.36	41.42	41.33	41.35
37.5	39.31	39.53	39.56	39.75	39.74	39.83	39.81	39.87	39.78	39.81
40.0	37.73	37.94	37.97	38.16	38.12	38.23	38.19	38.26	38.16	38.19
42.5	36.09	36.28	36.32	36.44	36.43	36.54	36.49	36.57	36.46	36.49
45.0	34.36	34.54	34.56	34.69	34.66	34.74	34.73	34.80	34.70	34.74
47.5	32.59	32.75	32.78	32.91	32.85	32.98	32.91	32.99	32.88	32.93
50.0	30.73	30.90	30.90	31.05	30.99	31.06	31.02	31.11	30.99	31.06
52.5	28.85	29.02	29.01	29.14	29.09	29.20	29.09	29.18	29.06	29.14
55.0	26.91	27.06	27.03	27.16	27.09	27.21	27.09	27.19	27.08	27.14
57.5	24.92	25.07	25.01	25.17	25.10	25.19	25.08	25.16	25.07	25.14
60.0	22.92	23.06	23.02	23.14	23.07	23.16	23.06	23.12	23.03	23.10
62.5	20.90	21.03	20.96	21.08	21.00	21.08	20.98	21.06	20.95	21.01
65.0	18.84	18.97	18.88	19.01	18.91	18.99	18.89	18.97	18.84	18.93
67.5	16.77	16.88	16.79	16.92	16.81	16.88	16.79	16.86	16.74	16.83
70.0	14.71	14.81	14.73	14.83	14.72	14.78	14.68	14.75	14.64	14.72
72.5	12.64	12.72	12.63	12.73	12.62	12.68	12.57	12.64	12.53	12.63
75.0	10.60	10.67	10.56	10.66	10.54	10.60	10.51	10.57	10.45	10.55
77.5	8.567	8.626	8.526	8.601	8.479	8.545	8.438	8.502	8.393	8.493
80.0	6.568	6.623	6.513	6.589	6.468	6.528	6.412	6.490	6.380	6.469
82.5	4.641	4.694	4.582	4.655	4.530	4.587	4.487	4.549	4.457	4.534
85.0	2.818	2.862	2.757	2.806	2.713	2.747	2.659	2.720	2.629	2.701
87.5	1.280	1.303	1.231	1.253	1.186	1.205	1.159	1.187	1.138	1.173
90.0	0.6981	0.6382	0.6938	0.6604	0.6977	0.6424	0.6935	0.6382	0.6843	0.6382
92.5	0.6609	0.6066	0.6566	0.6111	0.6609	0.6156	0.6609	0.6109	0.6564	0.6066
95.0	0.6384	0.5974	0.6293	0.6019	0.6428	0.6066	0.6382	0.5975	0.6292	0.5930
97.5	0.6202	0.5840	0.6112	0.5885	0.6157	0.5885	0.6202	0.5930	0.6157	0.5885
100.0	0.6066	0.5840	0.6021	0.5885	0.6111	0.5885	0.6022	0.5930	0.5977	0.5885
102.5	0.5930	0.5840	0.5885	0.5885	0.5975	0.5885	0.5975	0.5930	0.5975	0.5885
105.0	0.5885	0.5840	0.5797	0.5885	0.5930	0.5975	0.5930	0.6020	0.5930	0.5930
107.5	0.5885	0.5929	0.5794	0.5930	0.5930	0.6019	0.5930	0.5975	0.5885	0.5930
110.0	0.5885	0.5885	0.5794	0.5930	0.5930	0.5975	0.5930	0.6021	0.5885	0.5975
112.5	0.5885	0.5975	0.5794	0.5975	0.5930	0.6021	0.5930	0.6021	0.5885	0.6065
115.0	0.5885	0.5975	0.5794	0.6021	0.5930	0.6066	0.5930	0.6066	0.5885	0.6066
117.5	0.5885	0.6021	0.5794	0.6111	0.5930	0.6111	0.5930	0.6159	0.5885	0.6111
120.0	0.5885	0.6067	0.5794	0.6157	0.5930	0.6202	0.5930	0.6291	0.5885	0.6247
122.5	0.5885	0.6111	0.5794	0.6247	0.5975	0.6249	0.5975	0.6338	0.5975	0.6337
125.0	0.5930	0.6247	0.6020	0.6338	0.6022	0.6338	0.6021	0.6383	0.6066	0.6384
127.5	0.6111	0.6293	0.6066	0.6383	0.6066	0.6429	0.6064	0.6474	0.6066	0.6517
130.0	0.6066	0.6384	0.6111	0.6519	0.6066	0.6519	0.6066	0.6565	0.6066	0.6564
132.5	0.6066	0.6474	0.6111	0.6566	0.6111	0.6609	0.6156	0.6654	0.6157	0.6654
135.0	0.6154	0.6564	0.6203	0.6656	0.6246	0.6745	0.6292	0.6745	0.6247	0.6745
137.5	0.6202	0.6655	0.6202	0.6747	0.6247	0.6790	0.6338	0.6836	0.6338	0.6791
140.0	0.6292	0.6745	0.6292	0.6926	0.6428	0.6881	0.6428	0.6881	0.6384	0.6926
142.5	0.6427	0.6925	0.6473	0.6971	0.6519	0.6973	0.6564	0.7063	0.6607	0.7063
145.0	0.6608	0.6971	0.6834	0.7017	0.6655	0.7017	0.6700	0.7107	0.6700	0.7152
147.5	0.6790	0.6971	0.6971	0.7017	0.6745	0.7017	0.6700	0.7107	0.6745	0.7107
150.0	0.6790	0.6971	0.6971	0.7017	0.6790	0.7017	0.6790	0.7107	0.6834	0.7107
152.5	0.6790	0.6971	0.6971	0.7017	0.6836	0.7017	0.6881	0.7107	0.6881	0.7107
155.0	0.6880	0.6971	0.6971	0.7017	0.6926	0.7017	0.7016	0.7107	0.6971	0.7107
157.5	0.6926	0.6971	0.6971	0.7017	0.7015	0.7017	0.7017	0.7107	0.7018	0.7107
160.0	0.6971	0.6837	0.7017	0.7017	0.7017	0.7061	0.7107	0.7150	0.7062	0.7152
162.5	0.6882	0.6517	0.7017	0.6700	0.7017	0.6744	0.7107	0.6876	0.7107	0.6878
165.0	0.6474	0.6066	0.6702	0.6290	0.6926	0.6382	0.6927	0.6382	0.6972	0.6382
167.5	0.5884	0.5567	0.6157	0.5929	0.6382	0.6016	0.6430	0.6019	0.6385	0.5929
170.0	0.5253	0.4841	0.5481	0.5249	0.5704	0.5249	0.5798	0.5251	0.5797	0.5251
172.5	0.4619	0.4346	0.4845	0.4434	0.4935	0.4527	0.5030	0.4572	0.5076	0.4526
175.0	0.4346	0.4301	0.4391	0.4255	0.4436	0.4346	0.4483	0.4391	0.4527	0.4301
177.5	0.4346	0.4301	0.4391	0.4255	0.4346	0.4346	0.4436	0.4436	0.4346	0.4301
180.0	0.4391	0.4301	0.4391	0.4255	0.4346	0.4346	0.4436	0.4436	0.4301	0.4301

C角度范围: 0度 - 360度
C角度间隔: 5.0度
测试速度: 快速
环境温度: 25℃
测试人员: yechihong
测试日期: 2020-06-05

γ角度范围: 0度 - 180度
γ角度间隔: 0.5度
测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.272
环境湿度: 70%
测试距离: 8.425米 [K=1.0000]
备注:

Photometric Data Table [cd]

G/C	100.0	105.0	110.0	115.0	120.0	125.0	130.0	135.0	140.0	145.0
0.0	32.43	32.39	32.38	32.37	32.40	32.35	32.36	32.33	32.35	32.36
2.5	34.36	34.17	34.07	33.85	33.74	33.54	33.41	33.09	32.98	32.72
5.0	38.03	37.67	37.53	37.05	36.83	36.34	36.00	35.46	35.05	34.46
7.5	41.74	41.32	41.04	40.51	40.05	39.40	38.83	38.14	37.49	36.59
10.0	45.06	44.56	44.17	43.52	42.94	42.16	41.42	40.63	39.83	38.91
12.5	47.92	47.40	46.89	46.15	45.47	44.62	43.82	42.94	42.18	41.20
15.0	49.60	49.23	48.78	48.09	47.44	46.56	45.75	44.88	44.15	43.23
17.5	49.39	49.27	49.13	48.86	48.36	47.70	46.91	46.13	45.39	44.66
20.0	48.54	48.44	48.31	48.18	47.99	47.74	47.32	46.74	45.99	45.37
22.5	47.61	47.53	47.37	47.25	47.05	46.82	46.53	46.24	45.81	45.33
25.0	46.56	46.49	46.31	46.20	46.00	45.79	45.49	45.22	44.79	44.41
27.5	45.37	45.31	45.13	45.04	44.84	44.65	44.35	44.08	43.66	43.30
30.0	44.09	44.03	43.89	43.79	43.57	43.41	43.12	42.87	42.46	42.08
32.5	42.70	42.69	42.49	42.44	42.22	42.08	41.77	41.56	41.15	40.82
35.0	41.22	41.22	41.06	41.01	40.79	40.65	40.36	40.18	39.76	39.44
37.5	39.69	39.69	39.53	39.48	39.26	39.13	38.86	38.68	38.33	38.02
40.0	38.08	38.07	37.90	37.89	37.67	37.55	37.30	37.13	36.77	36.51
42.5	36.39	36.38	36.23	36.22	36.02	35.91	35.66	35.51	35.18	34.93
45.0	34.63	34.64	34.49	34.45	34.27	34.19	33.95	33.83	33.49	33.29
47.5	32.80	32.84	32.68	32.68	32.49	32.43	32.19	32.07	31.77	31.58
50.0	30.92	30.95	30.82	30.84	30.64	30.60	30.37	30.26	29.96	29.82
52.5	29.01	29.07	28.89	28.94	28.76	28.72	28.51	28.43	28.14	28.03
55.0	27.01	27.08	26.92	26.98	26.79	26.77	26.57	26.53	26.25	26.15
57.5	24.99	25.07	24.92	24.99	24.82	24.81	24.62	24.60	24.33	24.25
60.0	22.94	23.03	22.91	22.98	22.81	22.83	22.63	22.62	22.39	22.34
62.5	20.89	20.99	20.85	20.92	20.75	20.79	20.62	20.62	20.40	20.39
65.0	18.80	18.92	18.77	18.85	18.69	18.74	18.59	18.61	18.42	18.42
67.5	16.71	16.80	16.66	16.76	16.61	16.68	16.53	16.57	16.40	16.42
70.0	14.61	14.70	14.58	14.68	14.55	14.61	14.49	14.55	14.37	14.41
72.5	12.51	12.61	12.49	12.60	12.47	12.55	12.44	12.51	12.37	12.43
75.0	10.44	10.54	10.43	10.54	10.43	10.51	10.41	10.49	10.37	10.47
77.5	8.382	8.493	8.393	8.491	8.391	8.477	8.391	8.482	8.383	8.500
80.0	6.371	6.472	6.369	6.492	6.385	6.483	6.407	6.521	6.432	6.553
82.5	4.444	4.538	4.459	4.556	4.462	4.571	4.500	4.611	4.541	4.676
85.0	2.621	2.712	2.635	2.729	2.660	2.751	2.704	2.797	2.741	2.869
87.5	1.129	1.178	1.139	1.196	1.163	1.222	1.195	1.243	1.203	1.285
90.0	0.6932	0.6423	0.7020	0.6428	0.6883	0.6337	0.6885	0.6561	0.7198	0.6699
92.5	0.6565	0.6066	0.6655	0.6065	0.6564	0.6021	0.6565	0.6197	0.6790	0.6292
95.0	0.6339	0.5930	0.6338	0.5975	0.6293	0.5838	0.6339	0.5976	0.6428	0.5975
97.5	0.6111	0.5885	0.6201	0.5885	0.6022	0.5794	0.6113	0.5885	0.6292	0.5839
100.0	0.5976	0.5885	0.6022	0.5885	0.5930	0.5794	0.6021	0.5885	0.6066	0.5794
102.5	0.5931	0.5885	0.5930	0.5885	0.5840	0.5794	0.5885	0.5885	0.5930	0.5794
105.0	0.5885	0.5885	0.5885	0.5885	0.5794	0.5794	0.5840	0.5885	0.5885	0.5794
107.5	0.5885	0.5975	0.5885	0.5885	0.5794	0.5840	0.5840	0.5885	0.5885	0.5794
110.0	0.5885	0.5975	0.5885	0.5886	0.5794	0.5840	0.5840	0.5886	0.5840	0.5794
112.5	0.5885	0.6021	0.5885	0.5930	0.5794	0.5885	0.5840	0.5974	0.5840	0.5795
115.0	0.5885	0.6066	0.5885	0.6065	0.5794	0.5975	0.5840	0.6021	0.5840	0.5930
117.5	0.5885	0.6112	0.5885	0.6111	0.5794	0.5975	0.5840	0.6066	0.5840	0.5886
120.0	0.5885	0.6202	0.5885	0.6157	0.5794	0.6066	0.5840	0.6111	0.5840	0.6021
122.5	0.5885	0.6247	0.5885	0.6292	0.5794	0.6113	0.5840	0.6157	0.5840	0.6111
125.0	0.6063	0.6427	0.6066	0.6338	0.5794	0.6292	0.5885	0.6247	0.5885	0.6202
127.5	0.6066	0.6518	0.6066	0.6428	0.5974	0.6338	0.6111	0.6338	0.6020	0.6248
130.0	0.6066	0.6609	0.6066	0.6475	0.6111	0.6429	0.6066	0.6428	0.6021	0.6384
132.5	0.6156	0.6611	0.6111	0.6654	0.6111	0.6519	0.6066	0.6563	0.6111	0.6519
135.0	0.6292	0.6746	0.6200	0.6744	0.6156	0.6654	0.6157	0.6609	0.6157	0.6653
137.5	0.6336	0.6836	0.6292	0.6790	0.6203	0.6700	0.6292	0.6790	0.6291	0.6701
140.0	0.6470	0.6927	0.6428	0.6926	0.6338	0.6837	0.6338	0.6837	0.6338	0.6880
142.5	0.6654	0.7062	0.6563	0.7016	0.6429	0.6970	0.6518	0.6927	0.6428	0.6971
145.0	0.6790	0.7107	0.6609	0.7062	0.6654	0.7019	0.6699	0.7017	0.6744	0.6971
147.5	0.6790	0.7107	0.6700	0.7062	0.6744	0.7062	0.6789	0.7017	0.6745	0.6971
150.0	0.6835	0.7107	0.6790	0.7062	0.6789	0.7062	0.6745	0.7017	0.6789	0.6971
152.5	0.6926	0.7107	0.6881	0.7062	0.6880	0.7062	0.6836	0.7017	0.6881	0.6971
155.0	0.7016	0.7107	0.7016	0.7062	0.6926	0.7062	0.6971	0.7017	0.7015	0.6971
157.5	0.7060	0.7107	0.7017	0.7062	0.7017	0.7062	0.7017	0.7017	0.7017	0.6879
160.0	0.7152	0.7062	0.7062	0.7062	0.7017	0.6970	0.7017	0.6745	0.7017	0.6518
162.5	0.7107	0.6834	0.7062	0.6790	0.7017	0.6652	0.7018	0.6292	0.6659	0.6066
165.0	0.6883	0.6427	0.6883	0.6291	0.6746	0.6154	0.6565	0.5881	0.6247	0.5522
167.5	0.6384	0.5973	0.6385	0.5967	0.6248	0.5656	0.5979	0.5251	0.5659	0.5023
170.0	0.5796	0.5249	0.5752	0.5200	0.5616	0.4977	0.5347	0.4707	0.5117	0.4526
172.5	0.5030	0.4615	0.4935	0.4524	0.4890	0.4391	0.4799	0.4391	0.4619	0.4391
175.0	0.4527	0.4391	0.4527	0.4391	0.4437	0.4391	0.4436	0.4391	0.4436	0.4391
177.5	0.4391	0.4391	0.4436	0.4391	0.4391	0.4391	0.4436	0.4391	0.4436	0.4391
180.0	0.4391	0.4391	0.4391	0.4391	0.4391	0.4391	0.4436	0.4391	0.4436	0.4391

C角度范围: 0度 - 360度

C角度间隔: 5.0度

测试速度: 快速

环境温度: 25℃

测试人员: yechihong

测试日期: 2020-06-05

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.272

环境湿度: 70%

测试距离: 8.425米 [K=1.0000]

备注:

Photometric Data Table [cd]

G/C	150.0	155.0	160.0	165.0	170.0	175.0	180.0	185.0	190.0	195.0
0.0	32.38	32.47	32.47	32.44	32.48	32.44	32.52	32.55	32.49	32.50
2.5	32.56	32.30	32.22	32.20	32.20	32.24	32.39	32.32	32.30	32.33
5.0	34.05	33.31	32.98	32.63	32.44	32.44	32.62	32.53	32.66	32.93
7.5	35.99	34.93	34.29	33.66	33.18	33.00	33.16	33.17	33.51	34.06
10.0	38.14	36.91	36.07	35.12	34.37	33.84	33.96	34.13	34.77	35.69
12.5	40.51	39.34	38.54	37.68	37.00	36.45	36.50	36.72	37.27	38.11
15.0	42.68	41.60	40.96	40.32	39.85	39.51	39.59	39.71	40.04	40.65
17.5	44.10	43.39	42.98	42.48	42.26	41.98	42.09	42.19	42.35	42.78
20.0	44.81	44.41	44.11	43.89	43.76	43.67	43.81	43.89	43.91	44.10
22.5	44.87	44.57	44.43	44.32	44.30	44.26	44.44	44.46	44.41	44.45
25.0	44.05	43.95	43.83	43.83	43.88	43.85	44.06	44.03	43.94	43.91
27.5	42.92	42.88	42.74	42.77	42.79	42.79	42.99	42.95	42.89	42.85
30.0	41.74	41.71	41.54	41.61	41.61	41.62	41.80	41.76	41.72	41.68
32.5	40.48	40.46	40.29	40.37	40.33	40.40	40.53	40.49	40.46	40.42
35.0	39.12	39.12	38.96	39.03	38.99	39.08	39.19	39.14	39.11	39.07
37.5	37.69	37.72	37.57	37.63	37.60	37.65	37.76	37.71	37.67	37.65
40.0	36.18	36.24	36.08	36.14	36.11	36.16	36.29	36.23	36.23	36.16
42.5	34.61	34.67	34.51	34.59	34.55	34.64	34.71	34.65	34.69	34.60
45.0	32.99	33.06	32.89	32.99	32.92	33.00	33.11	33.05	33.07	32.98
47.5	31.30	31.40	31.24	31.33	31.25	31.36	31.44	31.37	31.39	31.29
50.0	29.54	29.65	29.50	29.59	29.53	29.64	29.70	29.64	29.66	29.55
52.5	27.73	27.89	27.74	27.83	27.77	27.88	27.93	27.87	27.88	27.77
55.0	25.89	26.05	25.93	26.02	25.95	26.05	26.09	26.04	26.06	25.96
57.5	24.03	24.21	24.07	24.18	24.11	24.22	24.26	24.18	24.21	24.11
60.0	22.11	22.31	22.18	22.29	22.24	22.34	22.34	22.29	22.31	22.23
62.5	20.17	20.40	20.28	20.38	20.31	20.42	20.44	20.34	20.39	20.32
65.0	18.22	18.47	18.35	18.45	18.39	18.49	18.51	18.42	18.47	18.38
67.5	16.24	16.52	16.40	16.51	16.45	16.54	16.56	16.47	16.55	16.43
70.0	14.28	14.57	14.46	14.59	14.52	14.61	14.60	14.51	14.59	14.47
72.5	12.31	12.60	12.51	12.64	12.59	12.67	12.65	12.57	12.65	12.52
75.0	10.35	10.65	10.58	10.72	10.65	10.76	10.72	10.64	10.71	10.59
77.5	8.406	8.711	8.649	8.801	8.736	8.842	8.797	8.723	8.797	8.673
80.0	6.482	6.795	6.749	6.913	6.855	6.962	6.929	6.850	6.914	6.778
82.5	4.622	4.941	4.910	5.068	5.033	5.128	5.095	5.021	5.067	4.922
85.0	2.825	3.137	3.108	3.256	3.234	3.349	3.304	3.238	3.268	3.130
87.5	1.259	1.482	1.455	1.565	1.547	1.646	1.604	1.545	1.562	1.460
90.0	0.7294	0.6878	0.7387	0.6876	0.7392	0.6878	0.6473	0.6936	0.6467	0.6980
92.5	0.6790	0.6337	0.6793	0.6292	0.6798	0.6336	0.6066	0.6475	0.5974	0.6475
95.0	0.6432	0.5975	0.6386	0.6018	0.6388	0.6020	0.5703	0.6113	0.5567	0.6068
97.5	0.6201	0.5703	0.6111	0.5658	0.6158	0.5568	0.5477	0.5842	0.5340	0.5795
100.0	0.5931	0.5659	0.5930	0.5568	0.5885	0.5523	0.5432	0.5704	0.5296	0.5704
102.5	0.5884	0.5659	0.5794	0.5568	0.5705	0.5523	0.5387	0.5477	0.5296	0.5569
105.0	0.5751	0.5659	0.5659	0.5568	0.5613	0.5523	0.5387	0.5433	0.5296	0.5432
107.5	0.5749	0.5659	0.5613	0.5568	0.5568	0.5523	0.5387	0.5343	0.5296	0.5388
110.0	0.5749	0.5659	0.5568	0.5568	0.5523	0.5523	0.5387	0.5342	0.5342	0.5342
112.5	0.5749	0.5660	0.5568	0.5613	0.5523	0.5568	0.5388	0.5342	0.5344	0.5342
115.0	0.5749	0.5749	0.5568	0.5659	0.5523	0.5613	0.5432	0.5342	0.5388	0.5342
117.5	0.5749	0.5794	0.5568	0.5704	0.5523	0.5659	0.5523	0.5342	0.5476	0.5342
120.0	0.5749	0.5885	0.5568	0.5794	0.5523	0.5749	0.5568	0.5342	0.5523	0.5342
122.5	0.5749	0.5930	0.5568	0.5841	0.5523	0.5795	0.5659	0.5342	0.5614	0.5342
125.0	0.5749	0.6066	0.5568	0.5975	0.5523	0.5887	0.5750	0.5342	0.5660	0.5432
127.5	0.5749	0.6202	0.5613	0.6066	0.5523	0.6067	0.5840	0.5342	0.5840	0.5432
130.0	0.5975	0.6248	0.5704	0.6246	0.5657	0.6157	0.5931	0.5432	0.5886	0.5432
132.5	0.6021	0.6429	0.6018	0.6337	0.5926	0.6293	0.6068	0.5523	0.6021	0.5524
135.0	0.6022	0.6564	0.6066	0.6429	0.6020	0.6472	0.6203	0.5659	0.6113	0.5659
137.5	0.6157	0.6654	0.6066	0.6565	0.6109	0.6521	0.6337	0.5794	0.6293	0.5884
140.0	0.6334	0.6791	0.6157	0.6610	0.6201	0.6700	0.6472	0.5975	0.6428	0.5975
142.5	0.6383	0.6836	0.6338	0.6790	0.6292	0.6834	0.6564	0.6066	0.6609	0.6064
145.0	0.6609	0.6926	0.6428	0.6836	0.6384	0.6790	0.6657	0.6201	0.6700	0.6156
147.5	0.6743	0.6926	0.6654	0.6836	0.6653	0.6790	0.6745	0.6380	0.6700	0.6292
150.0	0.6745	0.6926	0.6745	0.6836	0.6700	0.6790	0.6745	0.6428	0.6700	0.6699
152.5	0.6881	0.6926	0.6791	0.6836	0.6792	0.6790	0.6789	0.6609	0.6700	0.6925
155.0	0.6926	0.6881	0.6836	0.6787	0.6790	0.6655	0.6561	0.6700	0.6562	0.6926
157.5	0.6926	0.6700	0.6836	0.6472	0.6790	0.6382	0.6243	0.6744	0.6246	0.6749
160.0	0.6971	0.6336	0.6610	0.6021	0.6429	0.5839	0.5658	0.6203	0.5794	0.6386
162.5	0.6475	0.5929	0.6158	0.5428	0.5753	0.5069	0.4975	0.5483	0.5203	0.5841
165.0	0.5886	0.5206	0.5481	0.4795	0.5026	0.4435	0.4210	0.4754	0.4564	0.5207
167.5	0.5343	0.4706	0.4935	0.4346	0.4574	0.4391	0.4165	0.4301	0.4255	0.4618
170.0	0.4799	0.4436	0.4619	0.4346	0.4436	0.4436	0.4165	0.4255	0.4255	0.4436
172.5	0.4484	0.4436	0.4438	0.4346	0.4436	0.4436	0.4165	0.4255	0.4255	0.4346
175.0	0.4436	0.4436	0.4436	0.4346	0.4436	0.4436	0.4165	0.4255	0.4255	0.4346
177.5	0.4436	0.4436	0.4436	0.4346	0.4436	0.4436	0.4165	0.4255	0.4255	0.4346
180.0	0.4436	0.4436	0.4436	0.4346	0.4436	0.4436	0.4165	0.4255	0.4255	0.4346

C角度范围: 0度 - 360度

C角度间隔: 5.0度

测试速度: 快速

环境温度: 25℃

测试人员: yechihong

测试日期: 2020-06-05

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.272

环境湿度: 70%

测试距离: 8.425米 [K=1.0000]

备注:

Photometric Data Table [cd]

G/C	200.0	205.0	210.0	215.0	220.0	225.0	230.0	235.0	240.0	245.0
0.0	32.48	32.49	32.47	32.45	32.43	32.43	32.42	32.42	32.44	32.44
2.5	32.40	32.53	32.70	32.89	33.03	33.39	33.49	33.74	33.87	34.04
5.0	33.23	33.71	34.11	34.67	35.08	35.70	36.07	36.54	36.82	37.29
7.5	34.65	35.42	36.10	36.88	37.56	38.37	38.93	39.57	40.09	40.66
10.0	36.50	37.45	38.31	39.14	39.95	40.91	41.61	42.36	43.06	43.73
12.5	38.89	39.82	40.65	41.51	42.31	43.32	44.07	44.91	45.68	46.44
15.0	41.22	42.10	42.78	43.61	44.31	45.28	46.02	46.90	47.66	48.38
17.5	43.15	43.76	44.32	44.96	45.64	46.47	47.21	47.93	48.59	48.99
20.0	44.29	44.64	45.09	45.61	46.25	46.96	47.50	47.84	48.06	48.21
22.5	44.53	44.77	45.05	45.58	46.00	46.35	46.64	46.89	47.12	47.27
25.0	43.94	44.03	44.27	44.60	45.00	45.30	45.60	45.83	46.07	46.19
27.5	42.88	42.95	43.19	43.49	43.88	44.18	44.46	44.67	44.91	45.03
30.0	41.69	41.77	41.99	42.28	42.68	42.93	43.23	43.42	43.65	43.76
32.5	40.46	40.47	40.73	40.98	41.38	41.61	41.90	42.09	42.31	42.41
35.0	39.11	39.13	39.35	39.61	39.99	40.19	40.50	40.66	40.86	40.95
37.5	37.69	37.72	37.91	38.15	38.53	38.70	39.00	39.13	39.36	39.41
40.0	36.21	36.22	36.41	36.63	37.00	37.13	37.44	37.56	37.77	37.79
42.5	34.65	34.65	34.86	35.02	35.41	35.51	35.80	35.90	36.10	36.12
45.0	33.05	33.02	33.20	33.38	33.76	33.82	34.09	34.19	34.36	34.40
47.5	31.36	31.32	31.52	31.68	32.02	32.05	32.39	32.39	32.60	32.60
50.0	29.62	29.58	29.77	29.92	30.22	30.25	30.49	30.55	30.75	30.74
52.5	27.85	27.79	27.99	28.08	28.38	28.39	28.62	28.66	28.86	28.83
55.0	26.03	25.95	26.14	26.22	26.51	26.48	26.72	26.73	26.92	26.87
57.5	24.17	24.08	24.26	24.32	24.60	24.54	24.76	24.77	24.92	24.91
60.0	22.28	22.19	22.34	22.38	22.63	22.55	22.78	22.75	22.92	22.86
62.5	20.37	20.27	20.39	20.40	20.66	20.52	20.75	20.72	20.87	20.82
65.0	18.44	18.33	18.43	18.44	18.66	18.52	18.71	18.67	18.83	18.76
67.5	16.50	16.37	16.46	16.44	16.64	16.50	16.66	16.61	16.76	16.68
70.0	14.54	14.42	14.49	14.43	14.63	14.46	14.61	14.54	14.67	14.58
72.5	12.58	12.45	12.50	12.44	12.59	12.43	12.55	12.48	12.60	12.50
75.0	10.65	10.50	10.55	10.46	10.58	10.40	10.52	10.44	10.54	10.44
77.5	8.706	8.556	8.572	8.479	8.588	8.402	8.506	8.407	8.509	8.402
80.0	6.811	6.638	6.657	6.552	6.643	6.438	6.528	6.425	6.512	6.419
82.5	4.959	4.775	4.780	4.661	4.740	4.528	4.610	4.510	4.586	4.492
85.0	3.144	2.985	2.979	2.858	2.924	2.726	2.785	2.700	2.755	2.667
87.5	1.483	1.362	1.348	1.262	1.295	1.192	1.223	1.182	1.197	1.140
90.0	0.6426	0.6804	0.6335	0.6751	0.6198	0.6480	0.5840	0.6298	0.5882	0.6389
92.5	0.6020	0.6429	0.5975	0.6340	0.5884	0.6111	0.5568	0.5978	0.5477	0.6111
95.0	0.5656	0.6066	0.5567	0.6111	0.5613	0.5930	0.5523	0.5841	0.5477	0.5930
97.5	0.5387	0.5841	0.5477	0.5794	0.5613	0.5794	0.5523	0.5704	0.5477	0.5749
100.0	0.5387	0.5748	0.5477	0.5705	0.5613	0.5659	0.5523	0.5613	0.5477	0.5704
102.5	0.5387	0.5568	0.5477	0.5704	0.5613	0.5657	0.5523	0.5568	0.5477	0.5703
105.0	0.5387	0.5478	0.5477	0.5525	0.5613	0.5614	0.5523	0.5523	0.5477	0.5613
107.5	0.5387	0.5432	0.5477	0.5523	0.5659	0.5568	0.5613	0.5523	0.5477	0.5613
110.0	0.5387	0.5387	0.5477	0.5523	0.5659	0.5568	0.5568	0.5523	0.5523	0.5568
112.5	0.5387	0.5387	0.5477	0.5477	0.5660	0.5568	0.5613	0.5523	0.5568	0.5568
115.0	0.5432	0.5387	0.5523	0.5477	0.5704	0.5568	0.5659	0.5523	0.5613	0.5568
117.5	0.5477	0.5387	0.5658	0.5477	0.5750	0.5568	0.5704	0.5568	0.5704	0.5568
120.0	0.5523	0.5387	0.5659	0.5477	0.5841	0.5568	0.5750	0.5568	0.5793	0.5568
122.5	0.5616	0.5387	0.5750	0.5477	0.5929	0.5568	0.5840	0.5568	0.5884	0.5568
125.0	0.5750	0.5387	0.5840	0.5477	0.5930	0.5568	0.5885	0.5568	0.5886	0.5659
127.5	0.5885	0.5387	0.5930	0.5477	0.6022	0.5568	0.5976	0.5568	0.6020	0.5659
130.0	0.5885	0.5387	0.5978	0.5568	0.6113	0.5613	0.6156	0.5568	0.6110	0.5703
132.5	0.6066	0.5568	0.6112	0.5659	0.6292	0.5794	0.6157	0.5660	0.6201	0.5884
135.0	0.6157	0.5658	0.6247	0.5881	0.6248	0.6066	0.6292	0.5794	0.6292	0.6110
137.5	0.6337	0.5974	0.6383	0.6066	0.6427	0.6066	0.6429	0.5975	0.6383	0.6202
140.0	0.6385	0.6111	0.6473	0.6156	0.6473	0.6157	0.6519	0.6021	0.6519	0.6202
142.5	0.6608	0.6111	0.6609	0.6111	0.6566	0.6157	0.6611	0.6111	0.6565	0.6202
145.0	0.6745	0.6156	0.6701	0.6202	0.6700	0.6247	0.6701	0.6202	0.6700	0.6338
147.5	0.6880	0.6248	0.6745	0.6382	0.6836	0.6338	0.6790	0.6292	0.6790	0.6427
150.0	0.6836	0.6383	0.6745	0.6519	0.6836	0.6562	0.6790	0.6516	0.6790	0.6473
152.5	0.6836	0.6696	0.6700	0.6700	0.6835	0.6700	0.6790	0.6654	0.6790	0.6744
155.0	0.6700	0.6745	0.6700	0.6790	0.6792	0.6746	0.6790	0.6700	0.6790	0.6745
157.5	0.6426	0.6745	0.6649	0.6790	0.6745	0.6790	0.6791	0.6834	0.6790	0.6834
160.0	0.6111	0.6612	0.6247	0.6835	0.6426	0.6790	0.6743	0.6881	0.6834	0.6881
162.5	0.5520	0.6159	0.5749	0.6384	0.6020	0.6613	0.6246	0.6926	0.6652	0.6881
165.0	0.4886	0.5573	0.5342	0.5841	0.5566	0.6159	0.5927	0.6477	0.6111	0.6700
167.5	0.4479	0.4981	0.4617	0.5345	0.5204	0.5659	0.5341	0.5887	0.5564	0.6157
170.0	0.4255	0.4616	0.4391	0.4847	0.4572	0.5071	0.4662	0.5302	0.4884	0.5524
172.5	0.4255	0.4391	0.4391	0.4482	0.4346	0.4527	0.4301	0.4709	0.4301	0.4890
175.0	0.4255	0.4391	0.4391	0.4346	0.4346	0.4346	0.4301	0.4391	0.4301	0.4438
177.5	0.4301	0.4391	0.4391	0.4346	0.4346	0.4346	0.4346	0.4301	0.4301	0.4391
180.0	0.4346	0.4391	0.4391	0.4346	0.4346	0.4346	0.4346	0.4301	0.4301	0.4391

C角度范围: 0度 - 360度

C角度间隔: 5.0度

测试速度: 快速

环境温度: 25℃

测试人员: yechihong

测试日期: 2020-06-05

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.272

环境湿度: 70%

测试距离: 8.425米 [K=1.0000]

备注:

Photometric Data Table [cd]

G/C	250.0	255.0	260.0	265.0	270.0	275.0	280.0	285.0	290.0	295.0
0.0	32.44	32.44	32.44	32.43	32.43	32.37	32.43	32.39	32.38	32.37
2.5	34.12	34.29	34.32	34.47	34.43	34.54	34.47	34.52	34.41	34.45
5.0	37.47	37.81	37.88	38.15	38.08	38.27	38.06	38.10	37.85	37.86
7.5	41.03	41.44	41.63	41.92	41.92	42.04	41.87	41.78	41.48	41.27
10.0	44.21	44.73	44.98	45.30	45.34	45.37	45.16	45.02	44.60	44.22
12.5	47.06	47.62	47.96	48.23	48.30	48.25	48.09	47.83	47.31	46.85
15.0	48.96	49.41	49.68	49.84	49.93	49.87	49.77	49.57	49.16	48.69
17.5	49.20	49.32	49.38	49.44	49.46	49.44	49.43	49.38	49.31	49.16
20.0	48.39	48.48	48.55	48.61	48.61	48.59	48.59	48.54	48.50	48.36
22.5	47.44	47.53	47.61	47.65	47.67	47.63	47.64	47.59	47.55	47.41
25.0	46.36	46.44	46.55	46.56	46.61	46.54	46.57	46.50	46.48	46.34
27.5	45.19	45.27	45.39	45.38	45.43	45.34	45.39	45.32	45.31	45.17
30.0	43.93	43.99	44.11	44.10	44.15	44.11	44.12	44.06	44.04	43.89
32.5	42.59	42.62	42.74	42.73	42.80	42.73	42.78	42.67	42.70	42.55
35.0	41.14	41.16	41.27	41.29	41.35	41.32	41.32	41.23	41.23	41.09
37.5	39.59	39.61	39.73	39.73	39.79	39.74	39.78	39.68	39.69	39.54
40.0	37.97	38.00	38.12	38.11	38.17	38.14	38.18	38.09	38.12	37.95
42.5	36.30	36.32	36.43	36.41	36.48	36.44	36.49	36.38	36.44	36.29
45.0	34.57	34.56	34.68	34.65	34.72	34.69	34.73	34.62	34.70	34.53
47.5	32.77	32.75	32.87	32.85	32.91	32.85	32.92	32.83	32.88	32.75
50.0	30.90	30.88	30.98	30.96	31.04	30.97	31.04	30.96	31.02	30.88
52.5	29.02	28.97	29.08	29.03	29.13	29.05	29.11	29.04	29.13	28.97
55.0	27.04	27.01	27.11	27.07	27.15	27.08	27.15	27.08	27.16	27.02
57.5	25.05	25.00	25.12	25.05	25.15	25.06	25.18	25.06	25.15	25.01
60.0	23.01	22.97	23.07	23.00	23.11	23.02	23.12	23.04	23.16	23.01
62.5	20.95	20.89	21.01	20.93	21.05	20.94	21.07	20.95	21.08	20.94
65.0	18.87	18.82	18.93	18.86	18.96	18.85	18.98	18.88	19.01	18.87
67.5	16.79	16.71	16.84	16.76	16.86	16.77	16.89	16.81	16.93	16.78
70.0	14.70	14.64	14.73	14.66	14.76	14.67	14.79	14.69	14.83	14.71
72.5	12.61	12.53	12.64	12.55	12.66	12.58	12.69	12.61	12.71	12.62
75.0	10.56	10.47	10.55	10.48	10.59	10.51	10.62	10.53	10.67	10.56
77.5	8.524	8.429	8.511	8.422	8.525	8.447	8.556	8.484	8.613	8.531
80.0	6.513	6.418	6.505	6.416	6.521	6.452	6.548	6.468	6.593	6.514
82.5	4.576	4.483	4.565	4.478	4.572	4.506	4.608	4.534	4.648	4.578
85.0	2.741	2.663	2.732	2.660	2.738	2.676	2.773	2.708	2.817	2.754
87.5	1.174	1.134	1.171	1.124	1.176	1.150	1.204	1.171	1.241	1.206
90.0	0.5929	0.6384	0.5928	0.6298	0.5704	0.6386	0.5882	0.6395	0.6063	0.6532
92.5	0.5613	0.6067	0.5613	0.5977	0.5613	0.6024	0.5613	0.6067	0.5659	0.6157
95.0	0.5613	0.5975	0.5613	0.5840	0.5613	0.5886	0.5613	0.5930	0.5659	0.6021
97.5	0.5613	0.5795	0.5613	0.5705	0.5613	0.5794	0.5613	0.5749	0.5659	0.5841
100.0	0.5613	0.5659	0.5613	0.5660	0.5613	0.5704	0.5613	0.5704	0.5659	0.5794
102.5	0.5613	0.5659	0.5613	0.5659	0.5613	0.5659	0.5613	0.5659	0.5659	0.5704
105.0	0.5613	0.5613	0.5613	0.5613	0.5613	0.5659	0.5613	0.5613	0.5659	0.5659
107.5	0.5704	0.5613	0.5703	0.5613	0.5613	0.5613	0.5613	0.5613	0.5659	0.5659
110.0	0.5659	0.5613	0.5660	0.5613	0.5659	0.5613	0.5659	0.5613	0.5704	0.5659
112.5	0.5704	0.5613	0.5704	0.5613	0.5704	0.5613	0.5704	0.5613	0.5704	0.5659
115.0	0.5749	0.5613	0.5794	0.5613	0.5794	0.5613	0.5794	0.5613	0.5750	0.5659
117.5	0.5794	0.5613	0.5796	0.5613	0.5839	0.5613	0.5752	0.5613	0.5795	0.5659
120.0	0.5885	0.5613	0.5885	0.5613	0.5885	0.5613	0.5884	0.5613	0.5841	0.5659
122.5	0.5975	0.5613	0.5931	0.5613	0.5930	0.5613	0.5930	0.5613	0.5974	0.5659
125.0	0.6021	0.5613	0.6021	0.5613	0.6021	0.5613	0.6065	0.5613	0.6021	0.5659
127.5	0.6157	0.5613	0.6112	0.5613	0.6111	0.5658	0.6066	0.5613	0.6067	0.5659
130.0	0.6202	0.5748	0.6202	0.5703	0.6202	0.5749	0.6202	0.5659	0.6157	0.5659
132.5	0.6294	0.5930	0.6292	0.5884	0.6292	0.5930	0.6248	0.5749	0.6247	0.5749
135.0	0.6383	0.6021	0.6427	0.5930	0.6428	0.6066	0.6293	0.5928	0.6340	0.6064
137.5	0.6474	0.6021	0.6519	0.6021	0.6473	0.6066	0.6473	0.6021	0.6473	0.6066
140.0	0.6565	0.6066	0.6565	0.6065	0.6609	0.6110	0.6564	0.6111	0.6519	0.6066
142.5	0.6746	0.6157	0.6657	0.6202	0.6655	0.6202	0.6609	0.6111	0.6611	0.6157
145.0	0.6791	0.6337	0.6835	0.6292	0.6836	0.6291	0.6745	0.6202	0.6746	0.6292
147.5	0.6881	0.6427	0.6881	0.6427	0.6925	0.6383	0.6836	0.6339	0.6790	0.6382
150.0	0.6881	0.6609	0.6881	0.6473	0.6881	0.6518	0.6836	0.6428	0.6790	0.6473
152.5	0.6881	0.6745	0.6881	0.6700	0.6881	0.6699	0.6836	0.6654	0.6790	0.6656
155.0	0.6881	0.6790	0.6881	0.6835	0.6881	0.6700	0.6836	0.6745	0.6790	0.6790
157.5	0.6881	0.6835	0.6881	0.6790	0.6881	0.6834	0.6836	0.6745	0.6790	0.6790
160.0	0.6836	0.6881	0.6881	0.6881	0.6881	0.6925	0.6836	0.6836	0.6790	0.6836
162.5	0.6744	0.6881	0.6789	0.6881	0.6701	0.6926	0.6656	0.6836	0.6699	0.6836
165.0	0.6245	0.6792	0.6245	0.6792	0.6246	0.6745	0.6201	0.6792	0.6201	0.6657
167.5	0.5747	0.6203	0.5749	0.6157	0.5743	0.6249	0.5701	0.6204	0.5656	0.6157
170.0	0.5252	0.5660	0.5249	0.5616	0.5201	0.5615	0.5158	0.5614	0.5070	0.5523
172.5	0.4481	0.4937	0.4572	0.4936	0.4526	0.4980	0.4481	0.4845	0.4435	0.4800
175.0	0.4391	0.4437	0.4346	0.4437	0.4301	0.4436	0.4346	0.4391	0.4301	0.4346
177.5	0.4391	0.4346	0.4346	0.4346	0.4301	0.4346	0.4346	0.4301	0.4301	0.4346
180.0	0.4391	0.4346	0.4346	0.4301	0.4301	0.4346	0.4346	0.4301	0.4301	0.4346

C角度范围: 0度 - 360度
 C角度间隔: 5.0度
 测试速度: 快速
 环境温度: 25℃
 测试人员: yechihong
 测试日期: 2020-06-05

γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.272
 环境湿度: 70%
 测试距离: 8.425米 [K=1.0000]
 备注:

Photometric Data Table [cd]

G/C	300.0	305.0	310.0	315.0	320.0	325.0	330.0	335.0	340.0	345.0
0.0	32.40	32.35	32.36	32.33	32.35	32.36	32.38	32.47	32.47	32.44
2.5	34.32	34.24	34.08	34.00	33.74	33.73	33.48	33.60	33.37	33.22
5.0	37.51	37.31	36.89	36.60	36.16	35.84	35.35	35.31	34.76	34.38
7.5	40.84	40.40	39.88	39.35	38.71	38.20	37.48	37.17	36.40	35.75
10.0	43.65	43.06	42.39	41.69	40.92	40.33	39.46	39.06	38.16	37.37
12.5	46.14	45.44	44.60	43.89	43.03	42.41	41.57	41.17	40.30	39.56
15.0	47.99	47.29	46.41	45.63	44.78	44.12	43.40	43.04	42.33	41.80
17.5	48.80	48.20	47.49	46.74	46.00	45.32	44.68	44.36	43.88	43.52
20.0	48.21	48.02	47.72	47.18	46.53	45.87	45.36	45.04	44.79	44.59
22.5	47.27	47.07	46.86	46.60	46.25	45.81	45.31	45.04	44.86	44.84
25.0	46.21	46.01	45.83	45.55	45.22	44.82	44.52	44.24	44.18	44.20
27.5	45.06	44.85	44.68	44.39	44.10	43.70	43.41	43.11	43.09	43.11
30.0	43.81	43.59	43.44	43.17	42.90	42.49	42.24	41.90	41.89	41.93
32.5	42.46	42.27	42.12	41.85	41.58	41.19	40.95	40.63	40.62	40.66
35.0	41.03	40.84	40.71	40.43	40.19	39.82	39.59	39.27	39.27	39.30
37.5	39.52	39.33	39.22	38.92	38.74	38.35	38.16	37.82	37.83	37.87
40.0	37.94	37.75	37.65	37.38	37.18	36.82	36.65	36.30	36.33	36.36
42.5	36.28	36.08	36.00	35.76	35.56	35.22	35.07	34.71	34.78	34.79
45.0	34.56	34.36	34.30	34.07	33.89	33.57	33.43	33.08	33.14	33.16
47.5	32.77	32.59	32.53	32.30	32.16	31.81	31.72	31.36	31.46	31.45
50.0	30.90	30.73	30.70	30.47	30.34	30.04	29.94	29.60	29.68	29.70
52.5	29.01	28.82	28.83	28.63	28.51	28.24	28.13	27.83	27.89	27.90
55.0	27.06	26.91	26.91	26.70	26.65	26.36	26.28	25.96	26.05	26.05
57.5	25.07	24.93	24.93	24.77	24.73	24.45	24.42	24.08	24.19	24.17
60.0	23.05	22.92	22.94	22.76	22.74	22.49	22.48	22.18	22.27	22.25
62.5	21.03	20.90	20.92	20.76	20.76	20.53	20.53	20.21	20.33	20.32
65.0	18.97	18.84	18.89	18.75	18.77	18.54	18.56	18.25	18.39	18.37
67.5	16.88	16.79	16.84	16.69	16.74	16.53	16.57	16.27	16.41	16.40
70.0	14.81	14.70	14.77	14.66	14.71	14.53	14.60	14.30	14.45	14.44
72.5	12.72	12.63	12.72	12.60	12.69	12.52	12.61	12.33	12.49	12.46
75.0	10.67	10.58	10.68	10.57	10.68	10.54	10.64	10.37	10.53	10.52
77.5	8.626	8.556	8.656	8.576	8.672	8.579	8.672	8.444	8.602	8.585
80.0	6.632	6.561	6.675	6.595	6.725	6.616	6.748	6.527	6.700	6.685
82.5	4.694	4.636	4.757	4.684	4.818	4.729	4.869	4.654	4.835	4.827
85.0	2.867	2.828	2.929	2.868	2.988	2.920	3.051	2.859	3.020	3.025
87.5	1.282	1.270	1.327	1.288	1.347	1.311	1.399	1.250	1.357	1.350
90.0	0.5975	0.6525	0.6065	0.6801	0.6426	0.6887	0.6518	0.6975	0.6563	0.7068
92.5	0.5568	0.6202	0.5794	0.6430	0.6021	0.6520	0.6021	0.6609	0.6021	0.6565
95.0	0.5568	0.6021	0.5749	0.6202	0.5792	0.6248	0.5794	0.6292	0.5703	0.6204
97.5	0.5568	0.5842	0.5749	0.6066	0.5704	0.6066	0.5523	0.6023	0.5477	0.5976
100.0	0.5568	0.5794	0.5749	0.5930	0.5704	0.5885	0.5523	0.5885	0.5432	0.5749
102.5	0.5568	0.5704	0.5749	0.5885	0.5704	0.5794	0.5523	0.5748	0.5432	0.5613
105.0	0.5568	0.5659	0.5749	0.5749	0.5704	0.5748	0.5523	0.5568	0.5432	0.5567
107.5	0.5569	0.5659	0.5749	0.5749	0.5704	0.5569	0.5523	0.5523	0.5432	0.5432
110.0	0.5613	0.5659	0.5749	0.5749	0.5704	0.5568	0.5523	0.5477	0.5477	0.5388
112.5	0.5659	0.5659	0.5794	0.5749	0.5704	0.5568	0.5568	0.5477	0.5477	0.5387
115.0	0.5704	0.5659	0.5840	0.5749	0.5749	0.5568	0.5569	0.5477	0.5568	0.5387
117.5	0.5749	0.5659	0.5930	0.5749	0.5794	0.5568	0.5613	0.5477	0.5525	0.5387
120.0	0.5794	0.5659	0.5931	0.5749	0.5794	0.5568	0.5659	0.5477	0.5659	0.5387
122.5	0.5886	0.5659	0.6021	0.5749	0.5885	0.5568	0.5749	0.5477	0.5704	0.5387
125.0	0.5932	0.5659	0.6023	0.5749	0.5975	0.5568	0.5840	0.5477	0.5749	0.5387
127.5	0.6021	0.5659	0.6113	0.5749	0.5977	0.5568	0.5930	0.5477	0.5841	0.5387
130.0	0.6156	0.5704	0.6203	0.5749	0.6111	0.5568	0.6021	0.5523	0.5931	0.5432
132.5	0.6202	0.5930	0.6338	0.5930	0.6158	0.5657	0.6111	0.5657	0.6110	0.5523
135.0	0.6292	0.6065	0.6428	0.5975	0.6382	0.5749	0.6202	0.5705	0.6157	0.5659
137.5	0.6383	0.6066	0.6563	0.6021	0.6384	0.5974	0.6338	0.5930	0.6292	0.5883
140.0	0.6519	0.6066	0.6610	0.6065	0.6519	0.6067	0.6474	0.6021	0.6473	0.6067
142.5	0.6609	0.6200	0.6701	0.6158	0.6654	0.6066	0.6564	0.6066	0.6564	0.6066
145.0	0.6746	0.6248	0.6791	0.6292	0.6701	0.6157	0.6655	0.6157	0.6701	0.6157
147.5	0.6836	0.6384	0.6836	0.6382	0.6745	0.6337	0.6700	0.6381	0.6745	0.6336
150.0	0.6836	0.6518	0.6836	0.6473	0.6745	0.6471	0.6700	0.6473	0.6745	0.6427
152.5	0.6836	0.6654	0.6836	0.6744	0.6745	0.6609	0.6700	0.6700	0.6745	0.6608
155.0	0.6836	0.6745	0.6836	0.6789	0.6745	0.6745	0.6700	0.6700	0.6608	0.6701
157.5	0.6836	0.6880	0.6836	0.6790	0.6744	0.6745	0.6518	0.6745	0.6292	0.6744
160.0	0.6790	0.6836	0.6699	0.6790	0.6338	0.6745	0.6155	0.6565	0.5928	0.6293
162.5	0.6562	0.6836	0.6245	0.6567	0.6021	0.6339	0.5704	0.6024	0.5341	0.5620
165.0	0.6109	0.6428	0.5879	0.6159	0.5475	0.5843	0.5244	0.5391	0.4662	0.4935
167.5	0.5522	0.5931	0.5251	0.5615	0.4888	0.5209	0.4617	0.4753	0.4346	0.4391
170.0	0.4886	0.5254	0.4661	0.4980	0.4391	0.4710	0.4346	0.4482	0.4346	0.4255
172.5	0.4345	0.4663	0.4346	0.4483	0.4346	0.4346	0.4346	0.4346	0.4346	0.4255
175.0	0.4391	0.4347	0.4346	0.4346	0.4346	0.4346	0.4346	0.4346	0.4346	0.4255
177.5	0.4346	0.4346	0.4346	0.4346	0.4346	0.4346	0.4346	0.4346	0.4346	0.4255
180.0	0.4346	0.4346	0.4346	0.4346	0.4346	0.4346	0.4346	0.4346	0.4346	0.4255

C角度范围: 0度 - 360度

C角度间隔: 5.0度

测试速度: 快速

环境温度: 25℃

测试人员: yechihong

测试日期: 2020-06-05

γ角度范围: 0度 - 180度

γ角度间隔: 0.5度

测试系统: 远方(EVERFINE)GO-2000A_V1系统 V2.0.272

环境湿度: 70%

测试距离: 8.425米 [K=1.0000]

备注:


Photometric Data Table [cd]

G/C	350.0	355.0
0.0	32.48	32.44
2.5	33.07	32.90
5.0	33.98	33.65
7.5	35.08	34.52
10.0	36.42	35.70
12.5	38.74	37.98
15.0	41.12	40.62
17.5	43.13	42.94
20.0	44.47	44.36
22.5	44.86	44.86
25.0	44.32	44.39
27.5	43.24	43.30
30.0	42.06	42.10
32.5	40.81	40.81
35.0	39.45	39.47
37.5	38.01	38.01
40.0	36.50	36.50
42.5	34.94	34.93
45.0	33.32	33.30
47.5	31.63	31.60
50.0	29.88	29.82
52.5	28.08	28.03
55.0	26.23	26.18
57.5	24.35	24.33
60.0	22.43	22.37
62.5	20.49	20.46
65.0	18.53	18.49
67.5	16.56	16.52
70.0	14.59	14.54
72.5	12.64	12.57
75.0	10.67	10.64
77.5	8.736	8.708
80.0	6.845	6.800
82.5	4.995	4.962
85.0	3.193	3.167
87.5	1.480	1.469
90.0	0.6651	0.7111
92.5	0.6065	0.6566
95.0	0.5748	0.6248
97.5	0.5477	0.5886
100.0	0.5387	0.5704
102.5	0.5387	0.5568
105.0	0.5387	0.5434
107.5	0.5387	0.5387
110.0	0.5387	0.5342
112.5	0.5387	0.5342
115.0	0.5432	0.5342
117.5	0.5477	0.5342
120.0	0.5523	0.5342
122.5	0.5614	0.5342
125.0	0.5749	0.5342
127.5	0.5796	0.5342
130.0	0.5887	0.5342
132.5	0.6022	0.5433
135.0	0.6114	0.5613
137.5	0.6248	0.5704
140.0	0.6386	0.6066
142.5	0.6564	0.6021
145.0	0.6699	0.6111
147.5	0.6654	0.6291
150.0	0.6654	0.6338
152.5	0.6654	0.6653
155.0	0.6516	0.6654
157.5	0.6200	0.6656
160.0	0.5699	0.6113
162.5	0.4933	0.5389
165.0	0.4300	0.4576
167.5	0.4255	0.4165
170.0	0.4255	0.4165
172.5	0.4255	0.4165
175.0	0.4255	0.4165
177.5	0.4255	0.4165
180.0	0.4255	0.4165

C角度范围: 0度 - 360度
 C角度间隔: 5.0度
 测试速度: 快速
 环境温度: 25℃
 测试人员: yechihong
 测试日期: 2020-06-05


γ角度范围: 0度 - 180度
 γ角度间隔: 0.5度
 测试系统: 远方 (EVERFINE) GO-2000A_V1系统 V2.0.272
 环境湿度: 70%
 测试距离: 8.425米 [K=1.0000]
 备注:

I(cd)

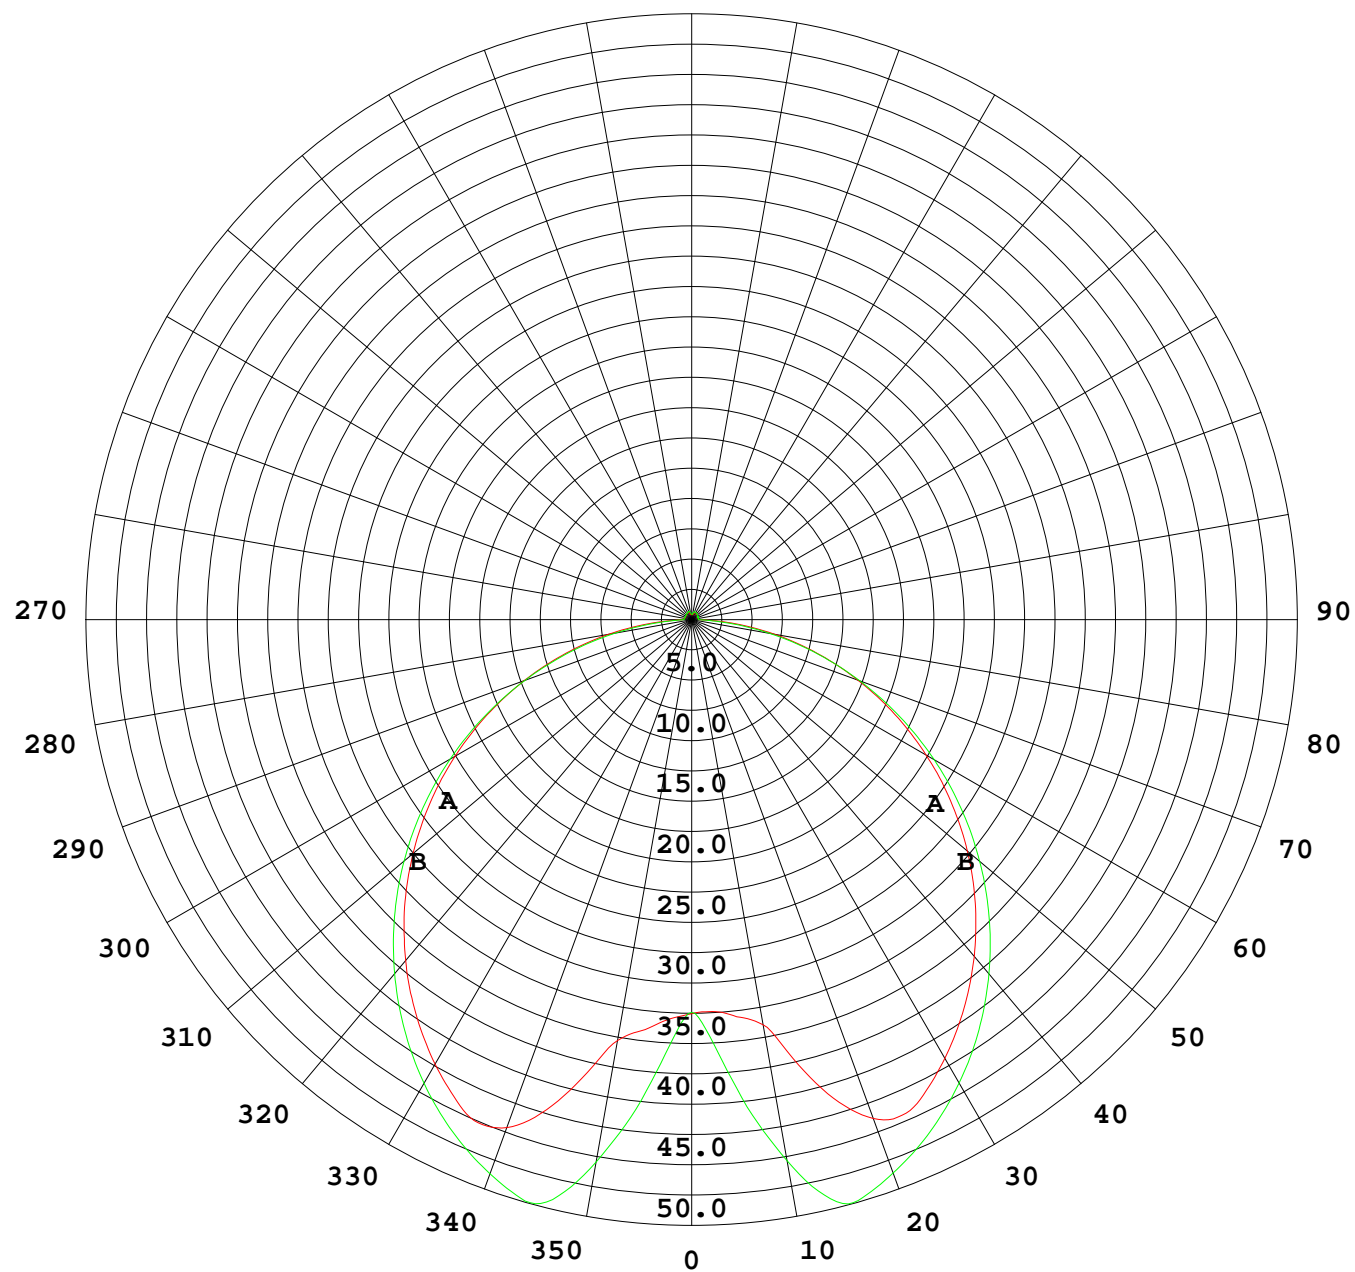

1000 lm

$\kappa = 1$

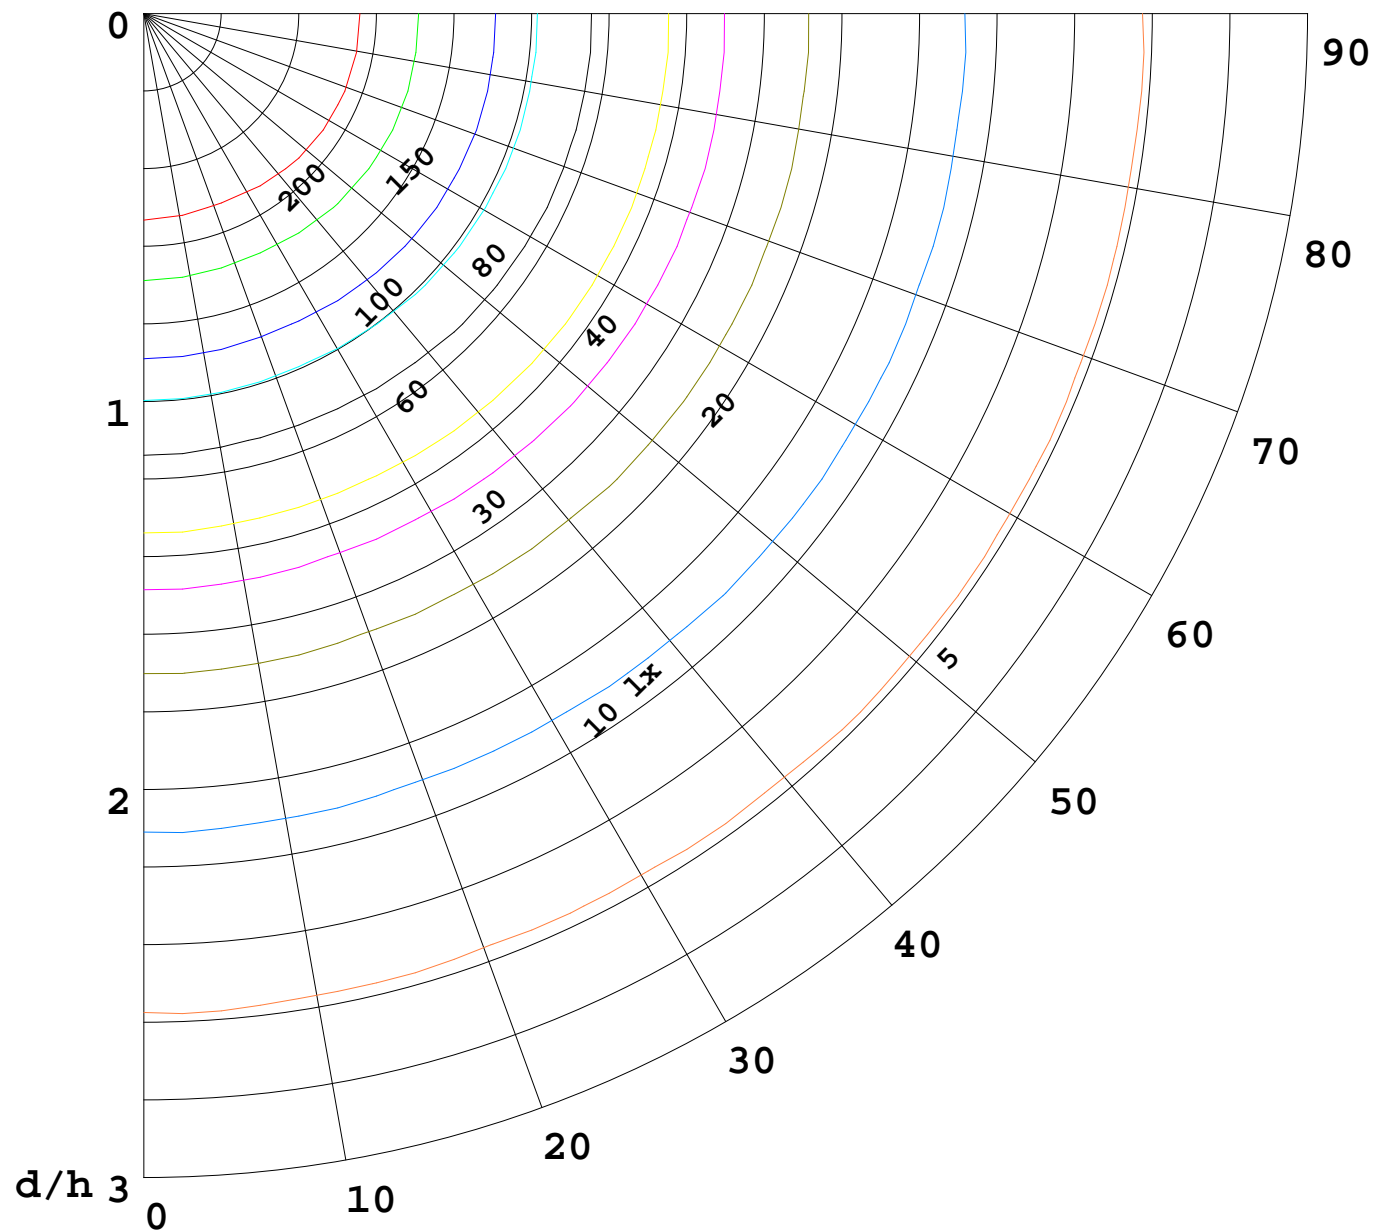

F = 5000 lm
 K = 0.7
 Hcc = 0.0 m
 Hfc = 0.0 m
 Eave = 100 lx

	Pcc	Pw	Pfc
————	70	50	30
————	50	30	20

